

How to Communicate Robot Motion Intent: A Scoping Review

Max Pascher

max.pascher@w-hs.de
Westphalian University of Applied Sciences
Gelsenkirchen, Germany
University of Duisburg-Essen
Essen, Germany

Stefan Schneegass

stefan.schneegass@uni-due.de
University of Duisburg-Essen
Essen, Germany

Uwe Gruenefeld

uwe.gruenefeld@uni-due.de
University of Duisburg-Essen
Essen, Germany

Jens Gerken

jens.gerken@w-hs.de
Westphalian University of Applied Sciences
Gelsenkirchen, Germany



(a) Motion [120]

(b) Attention [67]

(c) State [117]

(d) Instruction [128]

Figure 1: (a) *Robot motion intent*: The robot communicates its intended motion (e.g., a trajectory of the robot’s intended movement path is visualized in Augmented Reality [120]). Furthermore, our analysis revealed three additional types of intent that complement robot motion intents. (b) *Attention*: A robot aims to catch the user’s attention for subsequent movement activity (e.g., by moving its whole body [67]). (c) *State*: A robot communicates its state so that a human can predict future motions and identify potential conflicts before they occur (e.g., the robot communicates its movement activity with the help of a colored LED stripe [117]). (d) *Instruction*: The robot aims to provide specific instructions so that the human can assist further movement (e.g., by requesting to open a door [128]).

ABSTRACT

Robots are becoming increasingly omnipresent in our daily lives, supporting us and carrying out autonomous tasks. In Human-Robot Interaction, human actors benefit from understanding the robot’s motion intent to avoid task failures and foster collaboration. Finding effective ways to communicate this intent to users has recently received increased research interest. However, no common language has been established to systematize *robot motion intent*. This work presents a scoping review aimed at unifying existing knowledge. Based on our analysis, we present an intent communication model that depicts the relationship between robot and human through different intent dimensions (*intent type, intent information, intent*

location). We discuss these different intent dimensions and their interrelationships with different kinds of robots and human roles. Throughout our analysis, we classify the existing research literature along our intent communication model, allowing us to identify key patterns and possible directions for future research.

CCS CONCEPTS

• **General and reference** → **Surveys and overviews**; • **Human-centered computing**; • **Computer systems organization** → **Robotics**;

KEYWORDS

intent, motion, robot, cobot, drone, survey

ACM Reference Format:

Max Pascher, Uwe Gruenefeld, Stefan Schneegass, and Jens Gerken. 2023. How to Communicate Robot Motion Intent: A Scoping Review. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems (CHI '23)*, April 23–28, 2023, Hamburg, Germany. ACM, New York, NY, USA, 17 pages. <https://doi.org/10.1145/3544548.3580857>

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).
CHI '23, April 23–28, 2023, Hamburg, Germany
© 2023 Copyright held by the owner/author(s).
ACM ISBN 978-1-4503-9421-5/23/04.
<https://doi.org/10.1145/3544548.3580857>

1 INTRODUCTION

The field of Human-Computer Interaction (HCI) has moved beyond traditional user interfaces and interaction technologies. The omnipresence of Artificial Intelligence (AI) research and development requires our field to scrutinize the applicability of established design practices [2, 106]. Human interaction with AI is evolving away from being like operating a tool to being more like interacting with a partner, which is particularly interesting concerning Human-Robot Interaction (HRI) [53]. The area of HRI has been studied for a long time in HCI and, in particular, the CHI community [4, 65, 75, 90, 122]. For example, Arevalo Arboleda et al. [4] and Villanueva et al. [122] investigated combining robots and Augmented Reality (AR) technology to enable intuitive teleoperation, while others have explored on-site control of robot swarms [65] and home robots [75] as well as communication of emotions and intentions to the human [90].

Robots are versatile, they can assist us in our workplaces, support us at home, and accompany us in public spaces [1, 9, 76]. The applications of robots are manifold, significantly increasing human capabilities and efficiency [46]. While robots come in many forms, robotic arms in particular have been shown to be suitable for and adaptable to different use cases, such as production lines [15] and domestic care [96]. Here, they are known as cobots who support their users in Activities of Daily Living (ADLs), such as eating and drinking, grooming, or activities associated with leisure time.

As robots have a physical form, they tend to move and operate in the same space as humans. With advances in the degree of autonomy allowing for effective close-contact interaction, there is a need for a shared understanding between humans and robots. While robotic research tackles this from a sensory and path planning perspective (e.g., human-aware navigation [69]), the field of HCI (and HRI in particular) has been concerned with how humans may better understand robot behavior [12, 99, 124]. The subtleties of human communication are usually lost in this context, and robotic behavior needs to be understood from its own frame of reference. Robots are not a monolithic entity; with the many different types come just as many unique ways of conveying information, which could lead to erroneous interpretations by their human counterpart. An added complication is the increasing number of close-contact situations that allow little time to recognize and correct errors. This has led to numerous research efforts in recent years to find ways for robots to effectively communicate their intentions to their users [68]. This includes the direct communication of planned movements in space [54], but also less obvious means, such as drawing a user's attention to the robot [67], communicating the robot's movement activity state (e.g., active or inactive due to failure) [110], and facilitating human oversight by communicating their external perception of the world [57].

While all of these examples are concerned with communicating *robot motion intent*, they differ tremendously in their methods and goals. Other researchers, such as Suzuki et al., have subsequently identified *robot motion intent* as an essential research area [113]. But beyond further solution approaches, the field needs a common understanding of the concept of *robot motion intent* (i.e., what do we actually mean by intent, what are relevant intent dimensions, and how does the communication of *robot motion intent* influence the relationship between robot and human).

To this end, we conducted a scoping review of current approaches to communicate *robot motion intent* in the literature. Based on our findings, we introduce an intent communication model of *motion intent*, which depicts the relationship between robot and human through the means of different intent dimensions (*intent type*, *intent information*, and *intent location*; see Figure 1). We further discuss these different intent dimensions and their interrelationships with different kinds of robots and human roles. Throughout our analysis, we classify the existing research literature along our intent communication model to form a design space for communicating *robot motion intent*. Practitioners and researchers alike may further benefit from this work for the design and selection of specific mechanisms to communicate *motion intent*. We identify future research directions and current gaps, which are further highlighted in an interactive website that lists the papers and allows comparisons based on user-selected categories.¹

Our contribution is two-fold: 1) a survey contribution that includes our analysis and classification of previous literature as well as future research (cf. contribution from Wobbrock and Kientz [129]), and 2) a theoretical contribution that introduces an intent communication model and describes the relationship of its entities.

2 BACKGROUND

In this section, we will illustrate the need for communicating *robot motion intent* and discuss the current understanding of the term, which provides the foundation for our scoping review.

Robot is an umbrella term that describes a miscellaneous collection of (semi-)automated devices with various capabilities, technologies, and appearances [52]. These cyber-physical systems are often differentiated by their Degrees-of-Freedom (DoF) or ability to move and manipulate their environment. In industrial assembly lines, robotic arms manipulate and weld heavy parts [126], often in restricted areas [59]. Enabled by lightweight materials and safety sensors, robots have started to adapt to their users – today, they shut down when humans get too close or when resistance to the robot's movement is detected. This has led to the development of *cell-less* HRI [10], which has also paved the way for further scenarios, such as supporting people with disabilities in their daily lives [97]. Ajoudani et al. trace in their review paper several approaches of HRI, how it evolved, and how it increased over the last two decades [1]. They conclude that the success of HRI comes from combining human cognitive skills (i.e., intelligence, flexibility, and ability to act in case of unexpected events) with the robot's high precision and ability to perform repetitive tasks.

Matheson et al. proposed different types of such *cell-less* HRI, defined by their closeness of interaction [78]. They include *coexistence* (separation in space but not in time), *synchronized* (no separation in space but in time), *cooperation* (no separation in space or in time, but still not working on the same task), and *collaboration* (human and robot work on a task together, where the action of one has immediate consequences for the other). These works indicate that communication and interaction between robots and humans are critical to successful HRI. While research in human-aware navigation aims to make the robot smart enough to understand human

¹Interactive Data Visualization of the Paper Corpus. <https://rmi.robot-research.de>, last retrieved March 2, 2023.

behavior and react to it [69], supporting humans in understanding robot behavior is equally important [68]. As the work by Matheson et al. highlights, humans and robots increasingly share the same physical space in HRI, which makes communicating *robot motion intent* a particularly relevant aspect for safe and effective collaboration and a prerequisite for *explainable robotics* [78].

However, *robot motion intent* is a rather vague term and lacks a clear definition. Further, it is not consistently used by researchers in the field. Instead, similar underlying concepts have been investigated under terms such as situational awareness [74], forthcoming operation [80], or robot signaling system [117]. Suzuki et al., as part of their extensive literature review covering the relationship between AR and robotics, emphasize the potential of AR-based visualizations for communicating movement trajectories or the internal state of the robot [113]. However, as their literature review extends beyond intent communication, they do not further discuss or define different types of intent, nor do they provide a deeper understanding of intent properties.

Our work presents a systematic overview of the field and addresses the current issues by conducting a scoping review. Such a review or survey contribution helps to organize the published research of the field and enables reflection on previous findings after the field has reached a level of maturity [129]. The goal of our review is to provide a clear understanding and definition of *robot motion intent*, its properties, and its relationships within HRI. Furthermore, our work provides a first discussion to relate our HRI findings to the growing domain of Automated Vehicles (AVs), so-called external Human-machine interfaces (eHMIs), which have identified similar research and design challenges [11, 28, 32, 33, 100].

3 METHOD

Scoping reviews provide an overview of the extent, range, and nature of evolving research areas. They help to summarize research findings and identify research opportunities [5, 123]. Our approach is in line with previous work by Ghafurian et al. [48], Muñoz et al. [85], and Wallkötter et al. [125]. We applied *Preferred Reporting Items for Systematic Reviews (PRISMA)* [94] guidelines, focusing on the *Meta-Analyses Extension for Scoping Reviews (PRISMA-ScR)* [119].

For an overview of each step in our paper selection process, please refer to Figure 2. We will discuss specific details of the individual steps in the following subsections. (1) Based on an initial screening of relevant literature, potential search terms were identified to perform a systematic query using three primary databases in the field of HRI (ACM Digital Library, IEEE Xplore, and ScienceDirect; see Section 3.1). (2) A filtering step was applied based on an algorithmic analysis of the total corpus to identify the most relevant terms related to the topic (see Section 3.2). (3) The resulting set of 822 papers was manually screened in a two-step process, and eventually, additional sources were found through a cross-check of the references in selected papers (see Section 3.3). The final corpus consists of 77 papers.

3.1 Initial Query

We explored a variety of query terms and their combinations because, as discussed, the field currently lacks a coherent and established terminology. In addition, we found several terms to be used

in ambiguous ways, in particular terms such as *communication* and *motion*. Therefore, we decided on a broad search in this first step to increase recall and reduce the risk of overlooking relevant literature. We aimed to encompass a variety of different robot technologies while still focusing on the concept of intent, even though the word may be used in a variety of circumstances. We searched the titles, abstracts, and keywords of the databases' full-text collections with the following combined terms²:

$$(robot^* OR cobot^* OR drone^*) AND (intent^* OR intend^*) \quad (1)$$

3.2 Algorithmic Filtering

Due to our initial search being quite broad, further filtering was required to identify relevant papers. The initial set allowed us to apply an algorithmic approach similar to that of previous research done by O'Mara-Eves et al. [92]. Specifically, we applied the Term Frequency-Inverse Document Frequency (TF-IDF) [102] method to identify frequently used terminology within our corpus. TF-IDF has been shown to be suitable for information retrieval in literature reviews [73, 112]. First, we preprocessed the entries by a) combining each paper's title, keywords, and abstract into one field, b) fixing encoding issues such as & (and), ° (degree), and — (emdash), and c) converting the strings to lowercase as well as removing punctuation, numbers, symbols, and standard English stop-words from the corpus and replacing tokens with their lemmatizations [77]. For the creation of the TF-IDF-weighted document-term matrix, we calculated the Term Frequency (TF) for each term of our corpus, taking the static Inverse Document Frequency (IDF) into account, and computed the TF-IDF for each term over all documents. The resulting TF-IDF-weighted document-term matrix is shown in Table 1.

From the first 150 entries of the TF-IDF sorted list of tokens, three researchers independently qualified related terms to *communication* and *motion* – two terms we had decided to leave out of the initial broad query due to word ambiguity. During the following consensus process, we excluded related terms that were too general and ambiguous (e.g., “show” is frequently used in “Our results show[...]”, “present” in “In this work we present[...]”, “demonstrate” in “We demonstrate in our results[...]”, or “perform” in “We performed a study[...]”). All identified terms were then used in the filtering step by applying the following logic to the title, keywords, or abstract of each paper in our corpus:

$$(communicat^* OR visual^* OR feedback^*) AND (motion^* OR movement^* OR interaction^*) \quad (2)$$

For a paper to be accepted, a term from the cluster “communication” and another from “motion” (both OR operation) had to appear in the title, keywords, or abstract (AND operation). As a result, 822 papers remained in our corpus.

²ScienceDirect does not support the wildcard “*” but uses stemming and lemmatization techniques. In order to achieve search results based on wildcards “*”, we modified the combined term to: $(robot OR cobot OR drone) AND (intent OR intention OR intend OR intended)$.

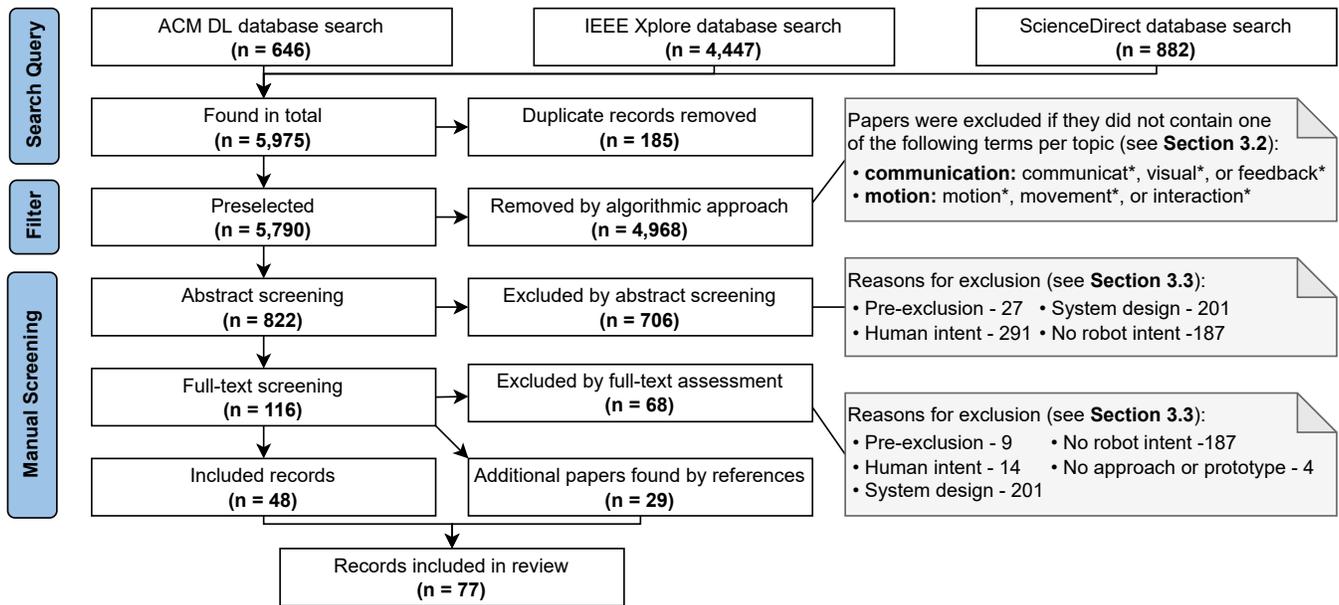


Figure 2: Flow chart of the corpus selection process with the identification of publishers and the initial search query (see Section 3.1), the reduction of the set by algorithmic filtering (see Section 3.2), and the manual screening (see Section 3.3), which resulted in 77 papers.

Table 1: Sorted list of terms from the TF-IDF-weighted document-term matrix. The selected terms are highlighted in bold.

Rank	Term	TF	IDF	TF-IDF	Rank	Term	TF	IDF	TF-IDF
1	human	6,547	0.92	6,052.89	7	interaction	3,383	1.33	4,515.61
2	control	6,769	0.87	5,902.24	15	movement	1,920	1.88	3,606.34
3	system	7,612	0.69	5,218.61	61	communicat	1,059	2.32	2,455.03
4	motion	3,640	1.42	5,154.59	140	feedback	665	2.74	1,820.08
5	model	3,978	1.24	4,938.74	143	visual	674	2.67	1,802.90

3.3 Manual Screening

The final phase of our paper selection process required manual screening, following an approach similar to that of Doherty and Doherty [34]. The process involved *abstract screening*, *full-text screening*, and *reference screening*. During the screening of all abstracts, we identified 706 out of 822 papers as not fitting into the scope of this review. The full-text analysis of the remaining 116 papers reduced the set to 48 papers. In addition, we screened the references cited by the set of 116 papers that were assessed for full-text screening. We identified 29 further relevant references, which we then included. This led to a final set of 77 papers, which were examined in the following. During the abstract and full-text screening, we **pre-excluded** 36 papers in unfitting paper formats still in the corpus, such as proceedings front matter, workshop calls, survey papers, or semi-duplicates – when two papers essentially presented the same contribution, due to one being a work in progress and the other a full paper. We also excluded 305 papers that aimed to convey the **human’s intent** (to the robot) but not the robot’s intent (e.g., Kurylo and Wilson [70]). Similarly, we removed another 210 papers where the research did not focus on the intention of robot

motion (**no robot intent**). For example, 1:1 teleoperated devices (e.g., van Waveren et al. [121]), or work focusing on AVs and eHMIs. We excluded another 220 **system design** papers that focused on aspects such as aesthetics, mathematical models of motion planning, or definitions (e.g., Girard et al. [50]). Eventually, we removed four papers where no approach or prototype was developed and reported (e.g., Thellman and Ziemke [118]).

4 INTENT COMMUNICATION MODEL

Through our literature review, we aim to improve understanding of the communication of *robot motion intent* by analyzing previous research. To that end, each author analyzed our literature corpus (n=77) in a multi-step process. It was discovered that several papers presented, combined, or empirically compared multiple intents (on average, more than two per paper). Therefore, we first systematically extracted all individual intents, resulting in a total of 172 intents. By screening these intents, we identified the primary entities (*robot*, *intent*, and *human*) as well as a communication flow between these entities that parallels that of the HCI model from Schomaker [104]. However, in contrast to the HCI model, we focus

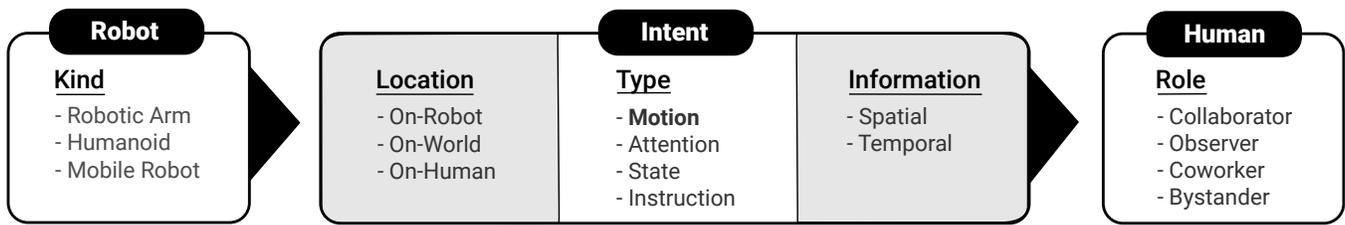


Figure 3: Overview of the intent communication model from robot to human. The three entities (i.e., robot, intent, human) and their dimensions are derived from our literature corpus. The flow of communication parallels the human-computer interaction model from Schomaker [104]. The main dimensions (i.e., kind, type, role) are discussed in Section 4, while a focused analysis of intent information and location is presented in Section 5.

solely on the communication of *intent* from *robot* to *human*, as previous research has already covered the inverse [62]. Furthermore, we identified a top-level entity, *goal*, which describes the motivation to communicate intent, as well as a low-level entity, *context*, which describes the situation in which the intent is communicated. Reflecting on all entities, we analyzed the intents by asking 1) *why* they were communicated (*goal*), 2) *who* communicated them (*robot*), 3) *what* they communicated (*intent*), 4) *to whom* they were communicated (*human*), and 5) *in which* circumstances they were communicated (*context*). Dimensions, categories, and properties emerged from the data through an open coding process of the extracted answers; specifically, we identified *kind of robot*, *location*, *type of intent*, *information of intent*, and *role of human* as our dimensions. The resulting *intent communication model* is shown in Figure 3. In the following, we present our findings for the three primary entities (*robot*, *intent*, and *human*), which we define and support by giving examples. We also discuss the *context* of communicating *robot motion intent*.

4.1 Human

In HRI, we can distinguish between different scenarios based on how involved a human is in the task performed by the robot. For the entity *human*, we utilize these levels of closeness between robot and human to define the different *roles of human*. Moreover, all four *roles of human* are illustrated in Figure 4.

4.1.1 Definition. The human has a crucial role during HRI, which strongly impacts which intents need to be communicated. From the analyzed intents of our corpus, we derived four different *roles of human* (*collaborator*, *observer*, *coworker*, and *bystander*). The roles are ordered by the degree of human collaboration and involvement with the robot, starting with the most involved (see Figure 4). These roles are also closely connected to the overarching goal of the HRI. Here, we found *supporting collaboration*, *oversight*, and *coexistence* to be of primary importance. In the following, we define the different roles, discuss their relationships to overarching goals, and support them with examples.

Collaborator. When in the role of a *collaborator*, a human works with a robot on a shared task in the same space and at the same time [78]. Thus, communication of *robot motion intent* in this context is for *supporting collaboration*. It aims to foster the coordination of robot and human actions regarding space and time to allow them

to work together on a shared task (e.g., a human-robot assembly team in a manufacturing scenario [3]). The action of one of the two (i.e., robot or human) has immediate consequences for the other. For example, consider the scenario of a robot handing an object to a human [36, 89]. Here, the human has to precisely anticipate and coordinate with the time and place the object will be positioned to enable efficient handover. To that end, Dragan et al. propose a robotic arm that applies so-called *legible motion*, allowing the human to infer the goal of motion quickly and with certainty [36]. The role of a *collaborator* represents the closest degree of HRI, as they form a team in which both depend on each other. In our literature corpus, a *collaborator* is described in 18 papers and is the recipient of 37 different intents.

Observer. A human functions as an *observer* when their main job is to supervise the task that is being carried out by the robot. Although they mostly just watch, an *observer* must be ready to intervene and take control of the robot. In this context, communication of *robot motion intent* is for the goal of *supporting oversight*. Here, the robot has to provide information to the human to allow effective intervention when needed. Fundamentally, *supporting oversight* refers to the ability of a human to judge and evaluate if a robot is operating within its intended parameters. For example, in work by Hetherington et al., the robot communicates its movement paths to an *observer*, which enables the *observer* to foresee and prevent potential collisions of the robot with obstacles [60]. Others communicate the inner state of the robot, allowing an *observer* to anticipate potential task failures that may occur due to problems with the robot itself, e.g., faulty sensor information [8, 57]. An *observer* is described in 47 papers and is the recipient of 94 intents.

Coworker. In the *coworker* role, the human works next to the robot but handles their own task. While these tasks may be part of a shared overarching effort or entirely disconnected, they take place in the same shared workspace (e.g., a robotic arm that picks up one out of two objects and leaves the other one for the human [71]). In the *coworker* context, communication of *robot motion intent* is for the purpose of *supporting coexistence*. Here, the human needs to understand the robot's motion to avoid safety-critical situations (e.g., colliding with the robot). In Aubert et al., a robot and human pick up objects from a shared bin for their individual tasks [6]. Here, communication of *robot motion intent* can help the human to coordinate their actions and avoid collisions with the robot. Chadalavada

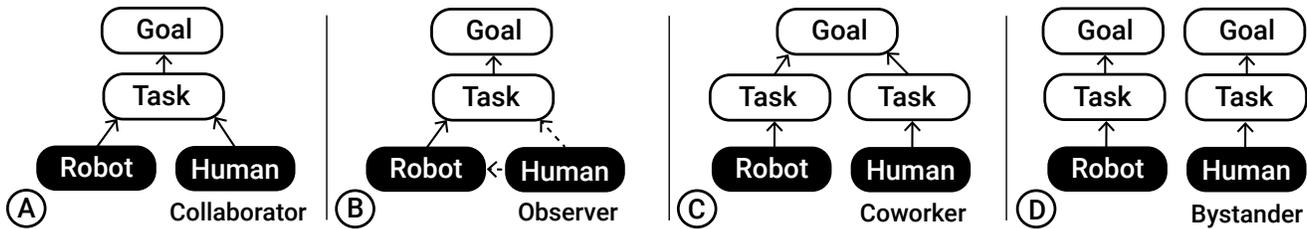


Figure 4: Comparison of the four human roles. The goals are further broken down by tasks to illustrate the relationships between the three entities (human, robot, and goals). A) The human (collaborator) and robot work on the same task. B) The human (observer) observes the robot and task but does not directly contribute. C) The human (coworker) and robot work on different tasks that contribute to the same goal. D) The human (bystander) and robot work on different tasks that contribute to different goals.

et al. showed that communication of *motion intent* through Spatial Augmented Reality (SAR) can improve perceived safety with mobile robots [20]. In their study, it meant that participants could choose safer walking paths and get closer to the robot without subsequent safety shutdowns. In our literature corpus, a *coworker* is described in six papers and is the recipient of 18 intents.

Bystander. The human is a *bystander* when they do not share the same task or the same task goal with the robot but still occupy an area overlapping the robot’s physical workspace. Like the *coworker* role, the *bystander* role involves communication of *robot motion intent* to support the goal of *supporting coexistence*. A *bystander* needs motion information to avoid collision and feel safe. For example, imagine a human and a robot encountering each other in a corridor. To allow the human to choose a walking path that avoids collision, the robot can move to one side and communicate its intended movement path in advance [83, 127]. A *bystander* is described in 17 papers and is the recipient of 23 intents.

4.2 Intent

We identified four different types of *intent* that the *robot* can communicate to the *human* to express its intentions, contributing to increased transparency. We consider these types to be the main dimension for classifying *intent* in the following text. In addition, we identified the dimensions *location* and *information*, as shown in Figure 3, which help to further classify and describe *intent*. Given their great importance, they are discussed separately in Section 5.

4.2.1 Definition. As our literature review focused on communicating *robot motion intent*, a majority of the corpus (69% of all papers; 54% of all unique intents) deals with *motion intent*. Nevertheless, we identified additional intent types that are related to *motion intent* and of equal importance (i.e., *attention*, *state*, and *instruction*). All types of *intent* are described below and the relationship of each to motion is explained. Furthermore, we found that for each type of *intent*, we can further distinguish between an *intent* that is related to the robot and one that is related to the world (more details can be found in the individual paragraphs below). An overview of all types of *intent* and associated papers can be found in Table 2.

Motion. These intents are the main type of *intent*. *Motion intent* is concerned with explicitly communicating future motions (i.e.,

actions that the robot will perform). As our survey is focused on *robot motion intent*, it encompasses more than 50% of the identified unique intents in our corpus. Most of the described intents deal with *robot self-actions*, aiming to indicate future robot movement. Thereby, users may be able to improve the coordination of their actions in concert with the robot’s behavior to avoid collisions and improve safety. For example, Chadalavada et al. employed SAR to communicate future movement direction as well as the specific path the robot will take, which helped *bystanders* feel safe around a robotic forklift [20]. *World actions* are activities that manipulate the world around the robot. Again, this may help the *bystander* to coordinate their activities, but it also helps the *observer* to understand when to take over control from the robot. Psarakis et al. applied this concept of *world actions* in a VR simulation to visually augment the nearby objects that the robot planned to grasp [98].

Attention. Intents that communicate the need for attention are a supportive element. They precede a *motion intent* to shift human attention toward the robot or process, especially when the humans’ attention is not guaranteed (e.g., because they focus on their own tasks). For example, Bolano et al. used acoustic feedback to alert the human and shift their attention toward the robot whenever it detected a possible collision [14]. An example of *robot-focused attention* was presented by Furuhashi et al., who designed an assistive robot based on the commercial Roomba device as a hearing dog that can notify deaf users of important events [45]. Here, the system uses physical touch to gain the human’s attention by gently bumping into their body. As an example of *world-focused attention*, Mutlu et al. had a humanoid robot quickly look at an object of interest. They studied whether collaborators were able to understand the robot’s gaze cues and correctly identify the object (among several others) that the robot had chosen as its object of interest [88].

State. A robot communicating its state allows a *human* to deduce potential future motions and identify conflicts before they occur. For example, a *robot* could collide with nearby objects due to errors in its sensor system. However, robot communication of the detected objects enables a *human* to take over control and mitigate the issue. For *state* intents, we distinguish between *robot self-perception*, meaning the state the *robot* communicates about itself (e.g., simple text feedback presented on a display that indicates states such as “stop” or “moving” [80]), and *robot world perception*, meaning the

Table 2: Overview of different intent types, sorted by their categories and subcategories, with their counts (and percentages) of identified relevant papers (max. 77) and unique intents (max. 172). Note: Papers may include multiple unique intents and can therefore appear in multiple categories and subcategories.

Category	Subcategory	Number of		References
		Papers (%)	Intents (%)	
Motion	Robot Self-Actions	38 (49.35%)	75 (43.60%)	[3, 12–14, 16, 17, 20, 21, 23, 27, 30, 31, 35–37, 42, 44, 49, 54, 55, 58, 60, 63, 72, 79–83, 99, 101, 115, 120, 124, 127, 128, 130, 132]
	World Actions	15 (19.48%)	18 (10.47%)	[3, 6, 21, 25, 40, 41, 57, 61, 64, 66, 71, 84, 89, 95, 98]
Attention	Robot-Focused Attention	6 (7.79%)	8 (4.65%)	[6, 14, 19, 24, 45, 67]
	World-Focused Attention	4 (5.19%)	5 (2.91%)	[74, 88, 109, 111]
State	Robot Self-Perception	23 (29.87%)	27 (15.70%)	[3, 7, 8, 18, 29, 31, 38, 43, 55, 63, 74, 79, 80, 91, 105, 110, 114, 116, 117, 124, 128, 131, 132]
	Robot World Perception	8 (10.39%)	12 (6.98%)	[3, 21, 30, 31, 57, 101, 128, 132]
Instruction	Robot-Centered Instructions	10 (12.99%)	16 (9.30%)	[8, 19, 39, 45, 51, 67, 74, 86, 108, 117]
	World-Centered Instructions	9 (11.69%)	11 (6.40%)	[3, 8, 13, 16, 21, 22, 84, 98, 128]

communication of the perceived state of the world (e.g., visually highlighting objects in the environment that the sensor system has successfully detected, allowing the user to predict and understand subsequent robot movement [57]).

Instruction. In several papers, we identified *instruction* intents that accompany robot motion. For example, if a *robot* is blocked by an obstacle, it can instruct a *human* to remove the obstacle so it can continue its motion. *Instructions* can be *robot-centered instructions* when they stand in relation to the robot itself (e.g., Moon et al. applied head gaze cues to communicate instructions to the user to complete the handover of an object from the robot’s gripper [84]). Or, in contrast, *instructions* can be *world-centered instructions* when they stand in relation to the world (e.g., a robot instructing a human to push a button on a wall to open an elevator so that it can continue its movement [128]).

4.2.2 Relationship to Human. Communicating a robot’s intended motion to the human helps to improve the perception and understanding of the robot’s behavior. However, humans that are, for example, not involved in the robots’ task – perhaps because they are focusing on their own tasks (*coworker*) or are just uninvolved in general (*bystander*) – often need an additional cue to be able to read *robot motion intent*, which makes the intent type *attention* necessary (e.g., by an acoustic prompt [6]). *State* intents enable a human to see not only the next *motion* but also the internal state and planning, enabling them to understand actions ahead of time. Such intents also support *observers* in their task of supervising the robot. Finally, collaboration means a constant shifting of who is in charge when humans and robots work together on a shared task. Therefore, *motion*, *state*, *attention*, and *instructions* are all necessary intents for providing a baseline for collaboration (*collaborator*).

4.3 Robot

In our corpus, we identified three different *kinds of robot*, which together form the *robot* entity.

4.3.1 Definition. We identified three main *kinds of robots*: *robotic arm*, *humanoid*, and *mobile robot*. These, in order, represent a spectrum of increasing mobility and flexibility based on the area of deployment, starting with stationary robots (still with many DoF) and ending with robots that are inherently mobile (which also includes mobile arms with many DoF on a platform). Based on different robots, researchers have investigated different intents with varying frequencies. In the following, we illustrate each *kind of robot* with examples from our literature corpus.

Robotic Arm. *Robotic arms* can be described as a chain of axis links. They are typically fixed to one place and can have a manipulator [47]. Nowadays, they are the industry standard in production lines of factories [15] and work alongside humans in HRI environments [35]. *Robotic arms* are described in 13 papers and send 22 intents.

Humanoid. *Humanoids* have two robotic arms with manipulators, a torso, a head, eyes, and, often, basic facial expressions. Due to the two robotic arms, *humanoids* have more DoF than single robotic arms. Still, *humanoids* are often fixed to one place and lack mobility. Nonetheless, they are an important part of HRI when working with humans in a shared workspace [72, 99]. In rare cases, they can move in space, imitating human movement. Here, anthropomorphic features of the robots – such as gaze or certain gestures – can decrease the time required to predict the robot’s intent [49]. *Humanoids* are described in 11 papers and send 21 intents.

Mobile Robot. With the addition of mobility comes increased flexibility. *Mobile robots* can be deployed in the air, on the ground, or in water. For this kind of robot, we have actively chosen to define them more broadly to include robots that appear only once in the

corpus. For *mobile robots* (also referred to as drones), we distinguish between *ground drones without a manipulator* that move between locations, *ground drones with a manipulator* that can also manipulate the world, *flying drones* that maneuver through the air, and *water drones* that operate on water or underwater. Communicating *motion intent* helps *ground drones without a manipulator* to, for example, lead or follow a human to a specific place [51]. It can help *ground drones with a manipulator* to, for example, communicate which object they intend to pick up [21]. *Flying drones* or *water drones*, on the other hand, can communicate their *motion intent* by flying or driving in a pattern [91, 114]. All kinds of drones can appear alone [27] or as a swarm of drones [17]. *Mobile robots* are described in 53 papers and send 129 intents.

4.3.2 Relationship to Intent. As *mobile robots* move around more freely, they frequently encounter human *bystanders* who cross their paths. Consequently, *mobile robots* often have to first shift the *human's* attention toward the robot's display, preparing them for the communication of the robot's intended *motion*. For example, a projection in front of the robot can catch the attention of a bystander while simultaneously informing about the direction of driving [79]. At the same time, *mobile robots* need to communicate their *state* and planning of actions ahead of time, either the inner state (e.g., what is the current mission status [74]) or the perceived world state (e.g., which objects are detected [31]). *Humanoids* and *robotic arms*, on the other hand, are often deployed in collaborative scenarios, teaming up with humans. Here, robots need to communicate their intended *motion* to coordinate their actions with a human collaborator (e.g., which items the robot intends to pick next from a shared bin [6] or when objects are to be handed over to the collaborator [89]).

4.4 Context

The *context* describes the setting of the HRI scenario. While the location is an essential part of the context, there is more: for example, the social environment [103]. Nonetheless, we consider the location helpful to define HRI scenarios. In our analysis, we found various types of locations, including *workplace*, *domestic*, and *outdoor*. In *workplace* settings, the robot is frequently part of an assembly line or, more generically, a manufacturing process (e.g., collaborating with a human worker [117]). However, *workplace* locations also include industrial settings, offices, or generic work rooms. In total, 42 papers took place at a *workplace* location. In *domestic* environments, robots support a task at home (e.g., by picking cups up off a kitchen table [36]). Here, we found five relevant papers. Finally, in two papers the robot could move freely outside (e.g., fulfilling a mission and communicating its status [38]). Apart from these, 28 papers had no particular location specified. Instead, the authors of these papers investigate more generic scenarios of *robot motion intent* (e.g., by stating that a robot moves between two locations but without fine details of these locations [80]). For these scenarios, it is unclear which locations are most relevant.

5 ANALYSIS OF INTENT INFORMATION AND LOCATION

In addition to the different *types of intent* discussed in the previous section, two other dimensions of intent emerged from the data: *Intent information* (which refers to the data communicated by the

robot) and *intent location* (which describes from where the intent is communicated to the *human*). In this section, we define these dimensions, illustrate their application with examples, and present a summary of empirical findings concerning their usage.

5.1 Intent Information

Based on our analysis of *how* the intent is communicated as well as *what* is communicated, we derived two main properties for categorizing *intent information: spatial* and *temporal*.

5.1.1 Spatial Property. The primary approach to convey spatial information is to embed it directly into the environment, i.e., have it **registered in space**. We identified 105 matching intents. We can further classify such intents as conveying *local* information (74 intents) or *directional* information (31 intents). *Local* information aims to precisely relate the information to the surrounding space by showing an exact position that naturally may contain orientation information as well. Han et al., as an example, convey *local* information by using SAR polygon visualizations to frame and highlight detected objects on a table, allowing a human observer to supervise the robot's intended movement and manipulation actions [57]. In contrast, *directional* information aims to communicate the explicit direction of movement (e.g., an arrow pointing in the direction of movement [20] or toward an object or person of interest [61]).

Information that is **unregistered in space**, however, employs an abstract encoding of the spatial property. In total, we identified 67 matching intents. This category includes the following *types of intent: Description*, *symbol*, and *signal*. *Description* (11 intents) applies to scenarios in which textual or verbal information is used (e.g., the robot informs the human verbally before initiating a movement to perform a touch [25]). *Symbol* (25 intents) applies to cases in which a symbolic representation is used to form the intent communication (e.g., a mobile robot that nods its head to request a human follow before moving toward its destination [39]). *Signal* (31 intents) applies when components are turned on/off to indicate a change (e.g., an acoustic prompt is turned on to gain attention for the upcoming communication of *motion intent* [6]). Mini maps provide an abstract but geographical encoding that includes the relationships among different objects in the environment [22, 124, 132].

Empirical Implications. While information *registered in space* provides a direct link between real-world objects and the displayed information, information *unregistered in space* lacks this connection and requires an additional mental step to create this link. Consequently, information *unregistered in space* may be less intuitive, and thus researchers have explored different combinations of information to mitigate that. Andersen et al. as well as Wengefeld et al. showed that combining multiple types of intent information that are *unregistered in space* (e.g., text *description* and *symbol* icons) helps to effectively communicate *motion intent* to the user [3, 128]. On the other hand, Staudte and Crocker found that combining both categories (*registered & unregistered*), which in their case involved a robot gazing at a specific object while a verbal description of the object played, leads to successful perception and understanding by the user [111]. Similarly, Bolano et al. later showed that a verbal description of the target can be combined with visual feedback of the motion endpoint to achieve the same improvement [14].

5.1.2 Temporal Property. The temporal property of *intent information* is about the distinction between having a *discrete* or *continuous* information flow. **Discrete** information has a fixed, distinct appearance in time and is beneficial for communicating *robot motion intent* because it enables the human to detect a change (i.e., the information appears) and it signals at which point the information loses its relevance (i.e., it disappears). For example, [Aubert et al.](#) equip their humanoid robot with a display that shows the number of the next bin it will approach, thereby allowing a human to avoid conflict with the robot [6]. Overall, we identified 89 intents that communicate *discrete* information. **Continuous** information, as has been provided in 83 intents, is available throughout the whole task or over several task phases (i.e., it is visible independent of its relevance to the current task). It enables the human to observe the robot, compare it with the world, and evaluate the correct task execution. [Tsamis et al.](#), for example, implemented AR visualizations for a Head-Mounted Display (HMD) to continuously communicate the intended movement space of a robotic arm by placing a semitransparent red sphere around the robotic arm [120].

Empirical Implications. [Faria et al.](#) showed that both *discrete* and *continuous* information are effective for communicating a *follow me* intent with spherical robots [39]. [Koay et al.](#) also evaluated both temporal properties using a robot dog that guides people living with hearing loss. However, they found that a motion-based approach (*continuous*), in which the robot's head movements request users to follow, is more successful than using a flashing Light-Emitting Diode (LED) stripe (*discrete*). They attribute this to the fact that head movements are more straightforward to interpret [67]. The findings of [Aubert et al.](#) suggest that combining *discrete* and *continuous* information is the most effective method. They showed that the combination of a motion-based approach (*continuous*) and a display approach (*discrete*) to communicate the robot motion end-point outperformed both uni-modal intent communication conditions [6].

5.1.3 Cross Relations. Inherently, the information of every intent has *spatial* and *temporal* properties. In the following, we describe the relationships between these properties of intent information.

For *unregistered in space*, the temporal property is almost evenly distributed between *discrete* and *continuous* information. Here, *signal* is an exception, as *discrete* (23 intents; e.g., having flashing lights attached to a mobile robot to indicate a discrete change of movement direction, similar to a car [60]) is used more often than *continuous* (eight intents; e.g., an LED stripe attached to the robot to continuously communicate the remaining distance to the target position through a color-coded progress bar [8]). *Signals* are primarily used to communicate sudden changes. Accordingly, such *discrete* events are naturally communicated as *discrete* intent information.

For *registered in space*, we see an uneven distribution for both subcategories. Intent information classified as *local* is mostly communicated as *continuous* information (50 intents; e.g., using SAR to continuously highlight an area in a workplace where the robot will be active during its movements and action [3]) instead of *discrete* (24 intents; e.g., using SAR to highlight a button on a wall that must be pushed by a human for the robot to continue its movement [128]). We think that robot *motion* likely relates to a continuous event because it is meant to happen over time and takes place continuously. Intent information classified as *directional*

is mostly communicated as *discrete* information (23 intents; e.g., a display is attached to the top of a mobile robot, communicating the intended movement direction with an arrow [80]) and only seldom as *continuous* (8 intents; e.g., a drone is visualized as an eye in AR, constantly looking in the direction of movement [124]). The reason is that *directions* are primarily used to communicate an updated movement direction to the human; therefore, it makes sense that they are most often given as *discrete* information.

5.2 Intent Location

Various technologies can enable the communication of *robot motion intent*. We found that, in particular, the placement of these technologies (*on-robot*, *on-world*, and *on-human*) can help to classify the different approaches in the literature, as there is often a relationship between the placement and specific types of technology.

On-Robot can be further divided into *robot-only* technology or additional *robot-attached* devices. We identified 114 intents communicated through *on-robot* technology. As an example for the subcategory *robot-only*, [Moon et al.](#) utilize the head orientation of the robot, mimicking a gaze cue, to communicate mid-air locations for its intended movement as an instruction to the user [84]. Nearly half of all categorized intents that utilize *on-robot* technology fall into that subcategory, which is of particular interest because it limits the need for additional technology and often involves imitation of human-to-human behavior. The *robot-attached* subcategory requires some additional hardware to be mounted to the robot (e.g., SAR, LED, or displays). For example, [Wengefeld et al.](#) attach a laser projection system to the robot and thereby communicate various types of intents, including *state*, *motion*, and *instruction* [128].

On-World has received relatively little attention in the literature. It includes, for example, small displays attached to the workspace at object bins [6], or a desktop display (to visualize *motion intent*) with speakers (to gain *attention*) next to the robot's workspace [14]. While the inability to change the environment may be less desirable from a generalizability perspective, for some technology, it adds significant benefits. In particular, SAR would be easier to realize with a fixed projector position *on-world* and it would allow for larger projection areas. We identified eight different intents *on-world*.

On-Human includes *head-attached* technologies, which primarily refers to HMD devices, which allow more complex visualizations. [Gruenefeld et al.](#), for example, experimented with different spatial visualizations, such as visualizing the intended movement path, previewing future locations of the robot arm, or visualizing the activity area as a whole [54]. In addition, some approaches rely on *hand-held* technologies. [Correa et al.](#), for example, used a tablet device displaying various types of information (map, live view, next steps) to support oversight and communicate *motion intent* [31]. We identified 50 intents *on-human*.

Empirical Implications. For the *intent location*, it is generally better to output information closer to the target. For example, [LeMasurier et al.](#) compared several motion-based and light-based approaches for *humanoids* to communicate an intended start of movement at an assembly workplace. They saw that an LED bracelet located closest to the workspace was the most noticeable and least confusing [72]. Furthermore, researchers found evidence that humans may prioritize *on-human* technology over *on-robot*

technology. For example, [Che et al.](#) were able to show that the use of a vibrotactile bracelet worn by the user led to a better expression of the robot's *motion intent*, reduced users' effort, and increased users' trust in the robot during a collision-avoidance movement when compared to a solely robot-based approach using *legible motion* [23]. Finally, combining multiple output technologies can further increase performance. For example, [Mullen et al.](#) investigated a multi-modal approach for communicating robot interference in a sorting scenario that combined an AR-HMD visualization and active feedback via a vibrotactile bracelet. They found that combining both feedback types outperformed the single modality baselines. It allowed the human to more efficiently teach the robot and decreased the required interaction time. [86].

5.3 Relation between Location and Information

In the following, we provide insights into the relationship between *intent location* and *intent information* (cf. [Table 3](#)).

5.3.1 Registered in Space. To communicate location information registered in space, most researchers rely on *head-attached* technologies, such as AR-HMDs (*on-human*). For example, [Tsamis et al.](#) implemented AR visualizations to communicate an intended movement trajectory of a robotic arm [120]. They placed small spheres along a defined path in 3D space from the robot's end-manipulator to a specific destination. They found that using their system improved task completion and robot idle times, with fewer interruptions to the overall workflow. In addition, users reported increased feelings of safety and trust toward the robot. In contrast, [Correa et al.](#) proposed a tablet visualization that showed a live camera feed of the mobile robot highlighting recognized objects in its environment via a wireframe in the visualization [31]. In addition to intents displayed *on-human*, robots are often used to convey information directly through specific movements or pointing (*on-robot*). For example, [Holladay et al.](#) used a robotic arm and its end-effector to communicate a directional cue by pointing toward an object placed on a table [61]. The resulting pointing configurations were reported to make it easier for novice users to infer the target object. Another example for displaying information *on-robot* is provided by [Hetherington et al.](#) They used SAR to project an arrow in the intended movement direction of the mobile robot on the floor [60]. Their results show that projected arrows were more socially acceptable and more understandable than flashing lights. Finally, information *registered in space* can be outputted *on-world*. For example, [Cleaver et al.](#) used their web-based environment [26] to compare four different conditions of visualizing the intended movement trajectory of a mobile robot on a *world-located* display [27]. In contrast, [Aubert et al.](#) placed small displays on three bins and used bin numbers and progress bars to indicate from which bin the robot coworker would next withdraw an item. However, the display-based approach could not significantly reduce the number of physical conflicts [6].

5.3.2 Unregistered in Space. Interestingly, a relatively large number of *symbol* information is communicated through the robot itself (*on-robot*). Here, we found many approaches where the robot performs specific movement patterns that the human has to decode appropriately. A symbolic approach is shown by [LeMasurier et al.](#) [72]. They slightly move the robot's manipulator to

the left and right to communicate an intended movement start. This approach received relatively high ratings on several measures; however, the authors recommend that the addition of light signals near the workspace and the origin of motion (like an LED bracelet) may provide a benefit to HRI in shared spaces. [Song and Yamada](#) provide an example of the type *symbol* by using different static and dynamic light patterns on a *robot-attached* colored LED stripe to illustrate different *states* of the robot [108]. Communication of *signal* information is mainly achieved through robot-attached technology, such as LED or audio speakers. Wearable technologies can also show spatially *unregistered* information (*on-human*). [Che et al.](#) propose a vibrotactile bracelet worn by the user to communicate an initiated collision-avoidance movement of a *mobile robot* [23]. This approach led to a better expression of the robot's *motion intent*, reduced users' effort, and increased users' trust in the robot. Furthermore, [Walker et al.](#) implemented a radar-like mini-map in the corner of an AR visualization to illustrate the relative position of the user to a drone [124]. Although the radar provides the user with the means to rapidly locate the robot relative to their own position, some participants mentioned that they did not need to use the radar much because they always faced the drone. Finally, unregistered information can also be presented *on-world*. [Bolano et al.](#) propose verbally describing the updated destination of the robot's end-manipulator via a speaker in addition to the screens placed in the shared workspace [14]. They found that users better understood the robot's intended motion, including when the robot had to reroute itself to avoid collision.

5.3.3 Discrete. *Discrete* information is usually presented directly *on-robot*. As an example of *robot-attached* technology, [Domonkos et al.](#) attached a colored LED stripe to the base of a robotic arm to communicate the intended direction of movement to a human coworker [35]. In contrast, [Glas et al.](#) proposed a *mobile robot* that performs head gestures to initiate either a follow-me or lead-me request to the human [51], relying on the robot itself as in *robot-only*. [Gu et al.](#) evaluated a visual feedback displayed through an AR-HMD (*on-human*), indicating the planned movement direction of the robot via an arrow visualization [55]. They found that the visualization improved perceived safety and task efficiency. Instead of relying on the visual modality, [Mullen et al.](#) proposed discrete feedback through a vibrotactile bracelet that is activated to communicate robot interference, triggering the human to move in order to allow the robot to continue its movement [86]. Their findings show that vibrational feedback can reduce the time required to notice and respond to an intent. [Aubert et al.](#) equipped bins (from which items could be chosen) in the environment with speakers to emit *discrete* auditory information *on world* [6]. They recommend not solely relying on auditory information, but using it in a multi-modal approach, which is further supported by [Bolano et al.](#) [14].

5.3.4 Continuous. Like *discrete* information, *continuous* information is primarily displayed *on-robot*. [Matsumaru et al.](#) attached an omnidirectional display *on-robot*, projecting an eyeball-like visualization that effectively communicates the direction of movement to a human [81]. In contrast, [Dragan et al.](#) propose performing legible motions with a robotic arm itself to communicate the next object it will grasp [36], which they found enabled fluent collaboration. As an example of communicating intents *on-human*, [Walker et al.](#)

Table 3: Overview of intents with different properties of *intent information* (by rows) in combination with *intent location* (by columns) – up to three example references are listed for each category. Please note that each intent has a spatial and a temporal property.

Category	Subcategory	On-Human		On-World	On-Robot	
		Head-Attached	Hand-Held		Robot-Only	Robot-Attached
(Spatial)	Local	35 [54, 99, 124]	3 [31, 127]	4 [6, 14, 27]	22 [12, 16, 36]	10 [30, 60, 128]
Registered	Directional	3 [55, 101, 124]	0	0	14 [61, 83, 84]	14 [20, 60, 80]
(Spatial)	Description	0	1 [31]	1 [14]	0	9 [79, 111, 128]
Unregistered	Symbol	5 [124, 132]	0	1 [22]	14 [51, 67, 72]	5 [3, 7, 108]
	Signal	0	3 [23, 24, 86]	2 [6, 14]	0	26 [35, 115, 117]
Total		43 (25.00%)	7 (4.07%)	8 (4.65%)	50 (29.07%)	64 (37.21%)
(Temporal)						
Discrete		15 [55, 89, 98]	4 [23, 24, 86]	5 [6, 14]	19 [45, 49, 72]	45 [19, 39, 130]
(Temporal)						
Continuous		28 [21, 120, 132]	3 [31, 127]	3 [14, 22, 27]	31 [17, 18, 36]	19 [29, 57, 81]

display a symbolic representation of a focusing eye lens in an AR-HMD, encoding the relative distance to the next target [124]. Their results show a significant improvement in users’ understanding of *robot motion intent*. Watanabe et al. proposed presenting *continuous* visual feedback via a tablet to inform a wheelchair passenger of a robot’s intended motion path [127]. Lastly, *continuous* information can be displayed *on-world*. Chandan et al. proposed a map visualization for a stationary tablet display that continuously shows the locations of three mobile robots and other objects of interest [22]. They found this approach significantly improved the participants’ ability to observe and assist the robot. Similarly, albeit only studied in a web-based experiment, Cleaver et al. proposed a 3D visualization displayed on a 2D screen to continuously communicate the intended path of a mobile robot [27].

6 DISCUSSION AND FUTURE RESEARCH

In the following, we discuss key findings of our literature survey and formulate future research directions as takeaway messages for the HCI community. The organization of the section follows the three entities *human*, *intent*, and *robot* from our intent communication model and concludes with a discussion of the overall model.

Human. From the analyzed intents of our corpus, we derived four different roles of human (*collaborator*, *observer*, *coworker*, and *bystander*). In our analysis, we found that the human role is strongly related to the overarching goals of communicating *motion intent* – a specific goal can be directly derived given a specific human role. For example, if the HRI scenario involves the human taking the role of an *observer*, the *motion intent* needs to help with fostering oversight. As a result, this indicates that practitioners and researchers should explicitly define the role and, thereby, the involved human stakeholders before settling on the robot or specific intents they may want to communicate. The human roles we found in a bottom-up process through our analysis align well with the previous work of Onnasch and Roesler [93]. In contrast to Onnasch and Roesler, the role of the *operator* did not show up in our analysis. We suggest this is because robots are not manually operated by humans in our

corpus, as this would not require the robot to communicate any intent [53].

Future Research: Our analysis showed that nearly all papers a) investigate individual human roles, e.g., they (often implicitly) pick one and focus on that, and b) design and study only for a 1:1 relationship between human and robot. The only exceptions to this are Faria et al., Kirchner et al., and Palinko et al., who investigate the legibility of robot movement for a group of humans [41] or explore the use of gaze cues to allow the robot to choose their human collaboration partner from a group of humans [66, 95]. This limited involvement of multi-user groups is, of course, to be expected in an emerging field that first needs to establish certain ground truths. Involving multiple persons or even multiple robots and persons complicates HRI tremendously, yet we think this is the subsequent step research must take. In particular, it would be interesting to reflect on the suitability of specific technologies (e.g., SAR will likely be better suited to satisfy multi-user scenarios compared to HMD technology).

Intent Types. Through our scoping review of *robot motion intent*, we observed that communication of motion often requires additional intents that serve as pre- or post-cursors to the communicated *motion intent*. Furthermore, we found that robot motion can also be indirectly communicated: For example, by communicating only the robot’s state (e.g., [8]) or by instructing a human to open a door so the robot can continue on its path (e.g., [127]). These various *types of intent* demonstrate the different facets of *robot motion intent*, which represent both actual intended movement trajectories and related communication. We see that as a key finding, distinguishing our work from previous research that focuses primarily on the communication of *motion intent* [99, 113, 124]. With our survey, we are confident that other researchers will start to adopt a more holistic and precise use of the term *robot motion intent* and, for example, start highlighting the need for related intents, as we found in our analysis.

Future Research: Researchers should investigate how the different *types of intent* may best be combined to achieve specific intent

communication goals. Currently, there is little empirical knowledge about, for example, when and to what extent a robot may need to first communicate *attention* before effectively being able to communicate *motion intent*. Further research should also challenge our classification of *types of intent* and potentially extend them.

Intent Information and Location. We derived two main properties that categorize our identified *intent information* related to space: *registered in space* (61.05%) and *unregistered in space* (38.95%). This almost-even distribution reveals that a lot of relevant research not only focuses on information that aims to convey *local* or *directional* information (e.g., a resulting trajectory [27]), but also on more abstract representations, namely *description*, *symbol*, and *signal*. These are often much less complex and indicate that *robot motion intent* can be communicated without visual 3D representations of future movement. This shows that there are viable alternatives to wearing special *on-body* technology, resulting in fewer system costs and a decreased setup time. An alternative can be the *intent location on-robot*. In previous work, researchers have refined robots with anthropomorphic elements – such as eye-like features or certain movement gestures – to communicate motion intent. Our literature review identified 15 such instances, specifically applying eye- or head-gaze (e.g., looking at an object to indicate a handover between human and robot [84]). While anthropomorphic elements may not be as precise as digital representations through technology means (e.g., visualizations in AR), they share the same baselines as in Human-Human Collaboration (HHC). The general assumption is that, in turn, they can be easily understood by users and can mostly be integrated into the actual HRI. A possible combination with a verbal description provides a multi-modal output to the user, resulting in faster recognition of the specific object [111].

Future Research: While previous research has explored combinations of spatially registered and unregistered information [111], we are unaware of research that has contrasted their effectiveness. Therefore, current design decisions may be based more on the availability of particular technology and less on the intended outcome. Future research should explore this further so that practitioners can more accurately judge the potential trade-offs between simple or complex information and related technology use. Regarding the use of anthropomorphic features, the integration of such communication cues has been explored regarding their legibility and effectiveness in communicating *robot motion intent*. However, their implicit consequences (e.g., causing the human to ascribe human-like behavior to the robot) may still need to be fully explored. The means and cues of communication have significant consequences for the trust relationship between humans and robots [56].

Robot. When looking at the three *kinds of robots* and their usage in research, we can see that the physical properties of a robot have a large impact on communication means: In particular, the *on-robot* location for intent communication. Some robots come with pre-installed displays, while others have anthropomorphic features built in. *Flying drones*, on the contrary, require some kind of remote communication tool (often in the form of HMDs) to communicate over a larger distance. Robots are also an area of much technical experimentation, i.e., many researchers are building or customizing their own robots. For example, one may add anthropomorphic features to a robotic arm. As a result, researchers tend to use these

built-in or customized features to communicate intent. They may often have only a particular kind of robot available; thus, they are limited to a certain way of communicating *robot motion intent*. Of course, this limits the generalizability of current findings, as each robot conveys unique features that can impact HRI.

Future Research: These findings show that many research endeavors explore only certain *kinds of robots*. A more systematic approach is called for to investigate the various kinds of robots and their impacts on communicating *robot motion intent*. We also found that more and more research applies simulation environments in Virtual Reality (VR) to explore HRI. Nevertheless, we need more studies to validate such findings and provide a broader foundation for their generalizability.

Context. Compared with previous research in AVs [28, 32] and eHMDs [33], we can identify several similarities, despite the substantial differences in the context of use and robot technology. Colley et al. found that visualizing internal information processed by an Augmented Reality (AR) could calibrate trust by enabling the perception of the vehicle's detection capabilities (and its failures) while only inducing a low cognitive load [28]. Currano et al. explored the interaction between complexity of head up displays, driving style, and situation awareness [32]. In the area of eHMDs, researchers have been able to distinguish between different *natures of message* (e.g., danger and safety zones) [33]. These correspond to our identified *types of intent*, highlighting different meanings for the user for the provided intent. In the context of AVs, the information used to formulate the actual intent is primarily unregistered in space. It uses text, symbols, and audio prompts. The intent primarily describes the vehicle's state (e.g., automated/manual, cruising, yielding) or advice/instructions to the pedestrian (e.g., to allow safe road crossing). The large differences between the fields of research result primarily from the standardizations in automotive research, such as roads, road signs, markings, and restrictions. Nevertheless, there are potential overlaps.

Future Research: The two fields have, from our perspective, not yet shared many cross-activities among researchers, which could lead, for example, to transferring those *motion intent* techniques that have shown to be effective in one field to the other. We could imagine that future research could benefit both sides if a more holistic perspective is applied. In particular, the research for eHMDs in AVs could benefit from more exploratory technological approaches in HRI, such as making use of AR-HMDs and applying more advanced visualization to communicate *motion intent*. While this may not be relevant for the near future, as such devices are not yet consumer-ready, this may change over the coming years.

The Model. The overall model is an abstract characterization of the current literature on *robot motion intent*. It may be seen as a summary of the current understanding of the design space for robot intent communication, where it illustrates all components and highlights their interconnection. Thereby, future researchers and practitioners should benefit from the model by using it as a guidance and checklist throughout the design phase of such Human-Robot scenarios; i.e., being guided to carefully think and decide upon different types of intents or whether intent information should be encoded spatially or temporally. In addition, the model can help to unify the language of *robot motion intent* and thereby support

researchers and practitioners to find related work as well as help to identify research gaps.

Future Research: We invite researchers to actively challenge the model and thereby helping to develop the field even further. They should scrutinize whether the design space is sufficiently classified or how it can and needs to be extended to cover future work. As our model was derived from the analysis of our literature corpus, it is fitted to the gathered research. Nonetheless, one can utilize novel research contributions that will be published in the future to revisit and evaluate the model (i.e., to investigate if novel contributions can still be described by our model). Moreover, we imagine that a more thorough discussion in the context of eHMIs may benefit the model as well as incorporating other lines of research that are concerned with communicating intent, such as [Sodhi et al.](#) or [Müller et al.](#) [87, 107].

7 CONCLUSION

This paper provides two main contributions: 1) a survey contribution that includes an analysis and classification of previous literature as well as future research directions, and 2) a theoretical contribution that introduces an intent communication model and describes the relationships of its entities, dimensions, and underlying properties. In particular, our work highlights that *robot motion intent* requires a broader perspective on robot intent and that it includes intent types that may seem, at first glance, unrelated to motion. However, in our analysis, we found that *attention*, *state*, and *instruction* are important and often necessary pre- or post-cursors to communicate explicit *motion intent*. We also found that only a few papers explicitly discuss or present the type of intent they aim to communicate and they also lack clear descriptions of intent information or location. Our work aims to help researchers in the future to better align their work with the suggested dimensions, making it easier to assess and compare different studies. Therefore, we aim to provide a foundation for a unified language regarding *robot intent*, even beyond motion. From a practical perspective, the classification of the existing research literature along our *intent communication model* helps researchers and practitioners alike to understand the design space for communicating *robot motion intent*. As it is an emerging field, much work has focused on finding novel approaches and solutions to communicate *robot motion intent* in one way or another. We have identified multiple areas of need for future research directions. However, we would like to emphasize once more that, above all, the field needs more systematic analysis and comparison of different approaches to improve understanding of the influences of different intent dimensions and properties. We believe that the presented intent communication model provides an empirically deduced foundation to inspire and guide such work.

REFERENCES

References marked with • are in the set of reviewed papers.

- [1] Arash Ajoudani, Andrea Maria Zanchettin, Serena Ivaldi, Alin Albu-Schäffer, Kazuhiro Kosuge, and Oussama Khatib. 2017. Progress and prospects of the human-robot collaboration. *Autonomous Robots* 42, 5 (Oct. 2017), 957–975. <https://doi.org/10.1007/s10514-017-9677-2>
- [2] Saleema Amershi, Dan Weld, Mihaela Vorvoreanu, Adam Fourney, Besmira Nushi, Penny Collisson, Jina Suh, Shamsi Iqbal, Paul N. Bennett, Kori Inkpen, Jaime Teevan, Ruth Kikin-Gil, and Eric Horvitz. 2019. Guidelines for Human-AI Interaction. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems* (Glasgow, Scotland Uk) (CHI '19). Association for Computing Machinery, New York, NY, USA, 1–13. <https://doi.org/10.1145/3290605.3300233>
- [3] • Rasmus S. Andersen, Ole Madsen, Thomas B. Moeslund, and Heni Ben Amor. 2016. Projecting robot intentions into human environments. In *2016 25th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 294–301. <https://doi.org/10.1109/ROMAN.2016.7745145>
- [4] Stephanie Arevalo Arboleda, Franziska Rucker, Tim Dierks, and Jens Gerken. 2021. Assisting Manipulation and Grasping in Robot Teleoperation with Augmented Reality Visual Cues. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems* (Yokohama, Japan) (CHI '21). Association for Computing Machinery, New York, NY, USA, Article 728, 14 pages. <https://doi.org/10.1145/3411764.3445398>
- [5] Hilary Arksey and Lisa O'Malley. 2005. Scoping studies: towards a methodological framework. *International Journal of Social Research Methodology* 8, 1 (Feb. 2005), 19–32. <https://doi.org/10.1080/1364557032000119616>
- [6] • Miles C. Aubert, Hayden Bader, and Kris Hauser. 2018. Designing Multimodal Intent Communication Strategies for Conflict Avoidance in Industrial Human-Robot Teams. In *2018 27th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 1018–1025. <https://doi.org/10.1109/ROMAN.2018.8525557>
- [7] • Alexandra Bacula, Jason Mercer, and Heather Knight. 2020. Legible Light Communications for Factory Robots. In *Companion of the 2020 ACM/IEEE International Conference on Human-Robot Interaction*, Tony Belpaeme, James Young, Hatice Gunes, and Laurel Riek (Eds.). ACM, New York, NY, USA, 119–121. <https://doi.org/10.1145/3371382.3378305>
- [8] • Kim Baraka, Stephanie Rosenthal, and Manuela Veloso. 2016. Enhancing human understanding of a mobile robot's state and actions using expressive lights. In *2016 25th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 652–657. <https://doi.org/10.1109/ROMAN.2016.7745187>
- [9] Andrea Bauer, Dirk Wollherr, and Martin Buss. 2008. Human-Robot Collaboration: A Survey. *International Journal of Humanoid Robotics* 05, 01 (2008), 47–66. <https://doi.org/10.1142/S0219843608001303>
- [10] Wilhelm Bauer, Manfred Bender, Martin Braun, and Rally, Peter und Scholtz, Oliver. 2016. Lightweight Robots in Manual Assembly – Best to Start Simply: Examining Companies' Initial Experiences with Lightweight Robots. <https://www.edig.nu/assets/images/content/Studie-Leichtbauroboter-Fraunhofer-IAO-2016-EN.pdf>
- [11] Pavlo Bazilinskyy, Dimitra Dodou, and Joost de Winter. 2019. Survey on eHMI concepts: The effect of text, color, and perspective. *Transportation Research Part F: Traffic Psychology and Behaviour* 67 (2019), 175–194. <https://doi.org/10.1016/j.trf.2019.10.013>
- [12] • Christopher Bodden, Daniel Rakita, Bilge Mutlu, and Michael Gleicher. 2018. A flexible optimization-based method for synthesizing intent-expressive robot arm motion. *The International Journal of Robotics Research* 37, 11 (2018), 1376–1394. <https://doi.org/10.1177/0278364918792295>
- [13] • Gabriele Bolano, Yuchao Fu, Arne Roennau, and Ruediger Dillmann. 2021. Deploying Multi-Modal Communication Using Augmented Reality in a Shared Workspace. In *2021 18th International Conference on Ubiquitous Robots (UR)*. IEEE, 302–307. <https://doi.org/10.1109/UR52253.2021.9494689>
- [14] • Gabriele Bolano, Arne Roennau, and Ruediger Dillmann. 2018. Transparent Robot Behavior by Adding Intuitive Visual and Acoustic Feedback to Motion Replanning. In *2018 27th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 1075–1080. <https://doi.org/10.1109/ROMAN.2018.8525671>
- [15] Sara Bragança, Eric Costa, Ignacio Castellucci, and Pedro M. Arezes. 2019. *A Brief Overview of the Use of Collaborative Robots in Industry 4.0: Human Role and Safety*. Springer International Publishing, Cham, 641–650. https://doi.org/10.1007/978-3-030-14730-3_68
- [16] • Maya Cakmak, Siddhartha S. Srinivasa, Min Kyung Lee, Sara Kiesler, and Jodi Forlizzi. 2011. Using spatial and temporal contrast for fluent robot-human hand-overs. In *Proceedings of the 6th international conference on Human-robot interaction - HRI '11*, Aude Billard, Peter Kahn, Julie A. Adams, and Greg Trafton (Eds.). ACM Press, New York, New York, USA, 489. <https://doi.org/10.1145/1957656.1957823>
- [17] • Beatrice Capelli, Cristian Secchi, and Lorenzo Sabatini. 2019. Communication Through Motion: Legibility of Multi-Robot Systems. In *2019 International Symposium on Multi-Robot and Multi-Agent Systems (MRS)*. IEEE, 126–132. <https://doi.org/10.1109/MRS.2019.8901100>
- [18] • Jessica R. Cauchard, Kevin Y. Zhai, Marco Spadafora, and James A. Landay. 2016. Emotion encoding in Human-Drone Interaction. In *2016 11th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 263–270. <https://doi.org/10.1109/HRI.2016.7451761>
- [19] • Elizabeth Cha and Maja Mataric. 2016. Using nonverbal signals to request help during human-robot collaboration. In *2016 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 5070–5076. <https://doi.org/10.1109/IROS.2016.7759744>

- [20] • Ravi Teja Chadalavada, Henrik Andreasson, Maike Schindler, Rainer Palm, and Achim J. Lilienthal. 2020. Bi-directional navigation intent communication using spatial augmented reality and eye-tracking glasses for improved safety in human-robot interaction. *Robotics and Computer-Integrated Manufacturing* 61 (2020), 101830.
- [21] • Tathagata Chakraborti, Sarath Sreedharan, Anagha Kulkarni, and Subbarao Kambhampati. 2018. Projection-Aware Task Planning and Execution for Human-in-the-Loop Operation of Robots in a Mixed-Reality Workspace. In *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 4476–4482. <https://doi.org/10.1109/IROS.2018.8593830>
- [22] • Kishan Chandan, Vidisha Kudalkar, Xiang Li, and Shiqi Zhang. [n.d.]. Negotiation-based Human-Robot Collaboration via Augmented Reality. <https://doi.org/10.48550/arXiv.1909.11227>
- [23] • Yuhang Che, Allison M. Okamura, and Dorsa Sadigh. 2020. Efficient and Trustworthy Social Navigation via Explicit and Implicit Robot-Human Communication. *IEEE Transactions on Robotics* 36, 3 (2020), 692–707. <https://doi.org/10.1109/TRO.2020.2964824>
- [24] • Yuhang Che, Cuthbert T. Sun, and Allison M. Okamura. 2018. Avoiding Human-Robot Collisions Using Haptic Communication. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 5828–5834. <https://doi.org/10.1109/ICRA.2018.8460946>
- [25] • Tiffany L. Chen, Chih-Hung King, Andrea L. Thomaz, and Charles C. Kemp. 2011. Touched by a robot. In *Proceedings of the 6th international conference on Human-robot interaction - HRI '11*, Aude Billard, Peter Kahn, Julie A. Adams, and Greg Trafton (Eds.). ACM Press, New York, New York, USA, 457. <https://doi.org/10.1145/1957656.1957818>
- [26] • Andre Cleaver, Darren Tang, Victoria Chen, and Jivko Sinapov. 2020. HAVEN: A Unity-based Virtual Robot Environment to Showcase HRI-based Augmented Reality. <https://doi.org/10.48550/ARXIV.2011.03464>
- [27] • Andre Cleaver, Darren Vincent Tang, Victoria Chen, Elaine Schaertl Short, and Jivko Sinapov. 2021. Dynamic Path Visualization for Human-Robot Collaboration. In *Companion of the 2021 ACM/IEEE International Conference on Human-Robot Interaction*, Cindy Bethel, Ana Paiva, Elizabeth Broadbent, David Feil-Seifer, and Daniel Szafrir (Eds.). ACM, New York, NY, USA, 339–343. <https://doi.org/10.1145/3434074.3447188>
- [28] • Mark Colley, Benjamin Eder, Jan Ole Rixen, and Enrico Rukzio. 2021. Effects of Semantic Segmentation Visualization on Trust, Situation Awareness, and Cognitive Load in Highly Automated Vehicles. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. ACM. <https://doi.org/10.1145/3411764.3445351>
- [29] • Emily C. Collins, Tony J. Prescott, Ben Mitchinson, and Sebastian Conran. 2015. MIRO. In *Proceedings of the 12th International Conference on Advances in Computer Entertainment Technology*, Adrian David Cheok, Mohd Shah Sunar, Ken Neo, and Yoram Chisik (Eds.). ACM, New York, NY, USA, 1–4. <https://doi.org/10.1145/2832932.2832978>
- [30] • Michael D. Covert, Tiffany Lee, Ivan Shindeev, and Yu Sun. 2014. Spatial augmented reality as a method for a mobile robot to communicate intended movement. *Computers in Human Behavior* 34 (2014), 241–248. <https://doi.org/10.1016/j.chb.2014.02.001>
- [31] • Andrew Correa, Matthew R. Walter, Luke Fletcher, Jim Glass, Seth Teller, and Randall Davis. 2010. Multimodal interaction with an autonomous forklift. In *2010 5th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 243–250. <https://doi.org/10.1109/HRI.2010.5453188>
- [32] • Rebecca Currano, So Yeon Park, Jylan James Moore, Kent Lyons, and David Sirkin. 2021. Little Road Driving HUD: Heads-Up Display Complexity Influences Drivers' Perceptions of Automated Vehicles. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. ACM. <https://doi.org/10.1145/3411764.3445575>
- [33] • Debargha Dey, Azra Habibovic, Andreas Löcken, Philipp Wintersberger, Bastian Pflöging, Andreas Riemer, Marieke Martens, and Jacques Terken. 2020. Taming the eHMI jungle: A classification taxonomy to guide, compare, and assess the design principles of automated vehicles' external human-machine interfaces. *Transportation Research Interdisciplinary Perspectives* 7 (2020), 100174. <https://doi.org/10.1016/j.trip.2020.100174>
- [34] • Kevin Doherty and Gavin Doherty. 2018. The construal of experience in HCI: Understanding self-reports. *International Journal of Human-Computer Studies* 110 (2018), 63–74. <https://doi.org/10.1016/j.ijhcs.2017.10.006>
- [35] • Mark Domonkos, Zoltan Dombi, and Janos Botzheim. 2020. LED Strip Based Robot Movement Intention Signs for Human-Robot Interactions. In *2020 IEEE 20th International Symposium on Computational Intelligence and Informatics (CINTI)*. IEEE, 121–126. <https://doi.org/10.1109/CINTI51262.2020.9305854>
- [36] • Anca D. Dragan, Shira Bauman, Jodi Forlizzi, and Siddhartha S. Srinivasa. 2015. Effects of Robot Motion on Human-Robot Collaboration. In *Proceedings of the Tenth Annual ACM/IEEE International Conference on Human-Robot Interaction*, Julie A. Adams, William Smart, Bilge Mutlu, and Leila Takayama (Eds.). ACM, New York, NY, USA, 51–58. <https://doi.org/10.1145/2696454.2696473>
- [37] • Anca D. Dragan and Siddhartha Srinivasa. 2013. Generating Legible Motion. In *Robotics: Science and Systems*.
- [38] • Brittany A. Duncan, Evan Beachly, Alisha Bevins, Sebasitan Elbaum, and Carrick Detweiler. 2018. Investigation of Communicative Flight Paths for Small Unmanned Aerial Systems * This work was supported by NSF NRI 1638099. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 602–609. <https://doi.org/10.1109/ICRA.2018.8462871>
- [39] • Miguel Faria, Andrea Costigliola, Patricia Alves-Oliveira, and Ana Paiva. 2016. Follow me: Communicating intentions with a spherical robot. In *2016 25th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 664–669. <https://doi.org/10.1109/ROMAN.2016.7745189>
- [40] • Miguel Faria, Francisco S. Melo, and Ana Paiva. 2021. Understanding Robots: Making Robots More Legible in Multi-Party Interactions. In *2021 30th IEEE International Conference on Robot & Human Interactive Communication (RO-MAN)*. IEEE, 1031–1036. <https://doi.org/10.1109/RO-MAN50785.2021.9515485>
- [41] • Miguel Faria, Rui Silva, Patricia Alves-Oliveira, Francisco S. Melo, and Ana Paiva. 2017. "Me and you together" movement impact in multi-user collaboration tasks. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2793–2798. <https://doi.org/10.1109/IROS.2017.8206109>
- [42] • Kerstin Fischer, Lars C. Jensen, Stefan-Daniel Suvéi, and Leon Bodenhausen. 2016. Between legibility and contact: The role of gaze in robot approach. In *2016 25th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 646–651. <https://doi.org/10.1109/ROMAN.2016.7745186>
- [43] • Paul Fletcher, Angeline Luther, Brittany Duncan, and Carrick Detweiler. 2021. Investigation of Unmanned Aerial Vehicle Gesture Perceptibility and Impact of Viewpoint Variance *. In *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 3531–3537. <https://doi.org/10.1109/ICRA48506.2021.9561094>
- [44] • Morten Roed Frederiksen and Kasper Stoev. 2019. Augmenting the audio-based expression modality of a non-affective robot. In *2019 8th International Conference on Affective Computing and Intelligent Interaction (ACII)*. IEEE, 144–149. <https://doi.org/10.1109/ACII.2019.8925510>
- [45] • Michihiko Furuhashi, Tsuyoshi Nakamura, Masayoshi Kanoh, and Koji Yamada. 2015. Touch-based information transfer from a robot modeled on the hearing dog. In *2015 IEEE International Conference on Fuzzy Systems (FUZZ-IEEE)*. IEEE, 1–6. <https://doi.org/10.1109/FUZZ-IEEE.2015.7337981>
- [46] • Rinat R. Galin and Roman V. Meshcheryakov. 2020. *Human-Robot Interaction Efficiency and Human-Robot Collaboration*. Springer International Publishing, Cham, 55–63. https://doi.org/10.1007/978-3-030-37841-7_5
- [47] • Rahul Gautam, Ankush Gedam, Ashish Zade, and Ajay Mahawadiwar. 2017. Review on development of industrial robotic arm. *International Research Journal of Engineering and Technology (IRJET)* 4, 03 (2017).
- [48] • Moojan Ghafurian, Jesse Hoey, and Kerstin Dautenhahn. 2021. Social Robots for the Care of Persons with Dementia: A Systematic Review. *J. Hum.-Robot Interact.* 10, 4, Article 41 (sep 2021), 31 pages. <https://doi.org/10.1145/3469653>
- [49] • Michael J. Gieleniak and Andrea L. Thomaz. 2011. Generating anticipation in robot motion. In *2011 RO-MAN*. IEEE, 449–454. <https://doi.org/10.1109/ROMAN.2011.6005255>
- [50] • Alexandre Girard, Jean-Philippe Lucking Bigué, Benjamin M. O'Brien, Todd A. Gishy, Iain A. Anderson, and Jean-Sébastien Plante. 2015. Soft Two-Degree-of-Freedom Dielectric Elastomer Position Sensor Exhibiting Linear Behavior. *IEEE/ASME Transactions on Mechatronics* 20, 1 (2015), 105–114. <https://doi.org/10.1109/TMECH.2014.2307006>
- [51] • Dylan F. Glas, Takahiro Miyashita, Hiroshi Ishiguro, and Norihiro Hagita. 2007. Robopal: Modeling Role Transitions in Human-Robot Interaction. In *Proceedings 2007 IEEE International Conference on Robotics and Automation*. IEEE, 2130–2137. <https://doi.org/10.1109/ROBOT.2007.363636>
- [52] • Michael A. Goodrich and Alan C. Schultz. 2008. Human-Robot Interaction: A Survey. *Foundations and Trends® in Human-Computer Interaction* 1, 3 (2008), 203–275. <https://doi.org/10.1561/1100000005>
- [53] • Jonathan Grudin. 2017. From tool to partner: The evolution of human-computer interaction. *Synthesis Lectures on Human-Centered Interaction* 10, 1 (2017), i–183.
- [54] • Uwe Gruenefeld, Lars Prädell, Jannike Illing, Tim Stratmann, Sandra Drolshagen, and Max Pfingsthorn. 2020. Mind the ARm. In *Proceedings of the Conference on Mensch und Computer*, Bernhard Preim, Andreas Nürnberger, and Christian Hansen (Eds.). ACM, New York, NY, USA, 259–266. <https://doi.org/10.1145/3404983.3405509>
- [55] • Morris Gu, Akansel Cosgun, Wesley P. Chan, Tom Drummond, and Elizabeth Croft. 2021. Seeing Thru Walls: Visualizing Mobile Robots in Augmented Reality. In *2021 30th IEEE International Conference on Robot & Human Interactive Communication (RO-MAN)*. IEEE, 406–411. <https://doi.org/10.1109/RO-MAN50785.2021.9515322>
- [56] • Adriana Hamacher, Nadia Bianchi-Berthouze, Anthony G. Pipe, and Kerstin Eder. 2016. Believing in BERT: Using expressive communication to enhance trust and counteract operational error in physical Human-robot interaction. In *2016 25th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. 493–500. <https://doi.org/10.1109/ROMAN.2016.7745163>

- [57] • Zhao Han, Alexander Wilkinson, Jenna Parrillo, Jordan Allspaw, and Holly A. Yanco. 2020. Projection Mapping Implementation: Enabling Direct Externalization of Perception Results and Action Intent to Improve Robot Explainability. *Proceedings of the AI-HRI Symposium at AAAI-FSS 2020* (2020). <https://doi.org/10.48550/arXiv.2010.02263>
- [58] • Jinying He, Anouk van Maris, and Praminda Caleb-Solly. 2020. Investigating the Effectiveness of Different Interaction Modalities for Spatial Human-robot Interaction. In *Companion of the 2020 ACM/IEEE International Conference on Human-Robot Interaction*, Tony Belpaeme, James Young, Haticce Gunes, and Laurel Riek (Eds.). ACM, New York, NY, USA, 239–241. <https://doi.org/10.1145/3371382.3378273>
- [59] Abdelfetah Hentout, Mustapha Aouache, Abderraouf Maoudj, and Isma Akli. 2019. Human-robot interaction in industrial collaborative robotics: a literature review of the decade 2008–2017. *Advanced Robotics* 33, 15–16 (2019), 764–799. <https://doi.org/10.1080/01691864.2019.1636714>
- [60] • Nicholas J. Hetherington, Elizabeth A. Croft, and H. Machiel F. van der Loos. 2021. Hey Robot, Which Way Are You Going? Nonverbal Motion Legibility Cues for Human-Robot Spatial Interaction. *IEEE Robotics and Automation Letters* 6, 3 (2021), 5010–5015. <https://doi.org/10.1109/LRA.2021.3068708>
- [61] • Rachel M. Holladay, Anca D. Dragan, and Siddhartha S. Srinivasa. 2014. Legible robot pointing. In *The 23rd IEEE International Symposium on Robot and Human Interactive Communication*. IEEE, 217–223. <https://doi.org/10.1109/ROMAN.2014.6926256>
- [62] Siddharth Jain and Brenna Argall. 2019. Probabilistic Human Intent Recognition for Shared Autonomy in Assistive Robotics. *J. Hum.-Robot Interact.* 9, 1, Article 2 (dec 2019), 23 pages. <https://doi.org/10.1145/3359614>
- [63] • Gunnar Johannsen. 2002. Auditory display of directions and states for mobile systems. In *Proceedings of the 2002 International Conference on Auditory Display*.
- [64] • Doğançan Kebüde, Cem Eteke, Tevfik Metin Sezgin, and Barış Akgün. 2018. Communicative Cues for Reach-to-Grasp Motions: From Humans to Robots. In *Proceedings of the 17th International Conference on Autonomous Agents and MultiAgent Systems (AAMAS '18)*. International Foundation for Autonomous Agents and Multiagent Systems, Richland, SC, 874–882.
- [65] Lawrence H. Kim, Daniel S. Drew, Veronika Domova, and Sean Follmer. 2020. User-Defined Swarm Robot Control. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems (Honolulu, HI, USA) (CHI '20)*. Association for Computing Machinery, New York, NY, USA, 1–13. <https://doi.org/10.1145/3313831.3376814>
- [66] • Nathan Kirchner, Alen Alempijevic, and Gamini Dissanayake. 2011. Nonverbal robot-group interaction using an imitated gaze cue. In *Proceedings of the 6th international conference on Human-robot interaction - HRI '11*, Aude Billard, Peter Kahn, Julie A. Adams, and Greg Trafton (Eds.). ACM Press, New York, New York, USA, 497. <https://doi.org/10.1145/1957656.1957824>
- [67] • K. L. Koay, G. Lakatos, D. S. Strydal, M. Gacsi, B. Bereczky, K. Dautenhahn, A. Miklosi, and M. L. Walters. 2013. Hey! There is someone at your door. A hearing robot using visual communication signals of hearing dogs to communicate intent. In *2013 IEEE Symposium on Artificial Life (ALife)*. IEEE, 90–97. <https://doi.org/10.1109/ALIFE.2013.6602436>
- [68] Danica Kragic, Joakim Gustafson, Hakan Karaoguz, Patric Jensfelt, and Robert Krug. 2018. Interactive, Collaborative Robots: Challenges and Opportunities. In *Proceedings of the 27th International Joint Conference on Artificial Intelligence (Stockholm, Sweden) (IJCAI'18)*. AAAI Press, Palo Alto, California, USA, 18–25.
- [69] Thibault Kruse, Amit Kumar Pandey, Rachid Alami, and Alexandra Kirsch. 2013. Human-aware robot navigation: A survey. *Robotics and Autonomous Systems* 61, 12 (2013), 1726–1743. <https://doi.org/10.1016/j.robot.2013.05.007>
- [70] Ulyana Kurylo and Jason R. Wilson. 2019. Using Human Eye Gaze Patterns as Indicators of Need for Assistance from a Socially Assistive Robot. In *Social Robotics*, Miguel A. Salichs, Shuzhi Sam Ge, Emilia Ivanova Barakova, John-John Cabibihan, Alan R. Wagner, Álvaro Castro-González, and Hongsheng He (Eds.). Springer International Publishing, Cham, 200–210.
- [71] • Mai Lee Chang, Reymundo A. Gutierrez, Priyanka Khante, Elaine Schaertl Short, and Andrea Lockerd Thomaz. 2018. Effects of Integrated Intent Recognition and Communication on Human-Robot Collaboration. In *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 3381–3386. <https://doi.org/10.1109/IROS.2018.8593359>
- [72] • Gregory LeMasurier, Gal Bejerano, Victoria Albanese, Jenna Parrillo, Holly A. Yanco, Nicholas Amerson, Rebecca Hetrick, and Elizabeth Phillips. 2021. Methods for Expressing Robot Intent for Human-Robot Collaboration in Shared Workspaces. *ACM Transactions on Human-Robot Interaction* 10, 4 (2021), 1–27. <https://doi.org/10.1145/3472223>
- [73] Ivan Lerner, Perrine Créquit, Philippe Ravaud, and Ignacio Atal. 2019. Automatic screening using word embeddings achieved high sensitivity and workload reduction for updating living network meta-analyses. *Journal of Clinical Epidemiology* 108 (April 2019), 86–94. <https://doi.org/10.1016/j.jclinepi.2018.12.001>
- [74] • Florent Levillain, David St-Onge, Giovanni Beltrame, and Elisabetta Zibetti. 2019. Towards situational awareness from robotic group motion. In *2019 28th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 1–6. <https://doi.org/10.1109/RO-MAN46459.2019.8956381>
- [75] Kexi Liu, Daisuke Sakamoto, Masahiko Inami, and Takeo Igarashi. 2011. Roboshop: Multi-Layered Sketching Interface for Robot Housework Assignment and Management. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (Vancouver, BC, Canada) (CHI '11)*. Association for Computing Machinery, New York, NY, USA, 647–656. <https://doi.org/10.1145/1978942.1979035>
- [76] Hamza Mahdi, Sami Alperen Akgun, Shahed Saleh, and Kerstin Dautenhahn. 2022. A survey on the design and evolution of social robots – Past, present and future. *Robotics and Autonomous Systems* 156 (2022), 104193. <https://doi.org/10.1016/j.robot.2022.104193>
- [77] Christopher D. Manning, Prabhakar Raghavan, and Hinrich Schütze. 2008. *Introduction to Information Retrieval*. Cambridge University Press, Cambridge.
- [78] Eloise Matheson, Riccardo Minto, Emanuele G. G. Zampieri, Maurizio Faccio, and Giulio Rosati. 2019. Human-Robot Collaboration in Manufacturing Applications: A Review. *Robotics* 8, 4 (2019). <https://doi.org/10.3390/robotics8040100>
- [79] • Takafumi Matsumaru. 2006. Mobile Robot with Preliminary-announcement and Display Function of Forthcoming Motion using Projection Equipment. In *ROMAN 2006 - The 15th IEEE International Symposium on Robot and Human Interactive Communication*. IEEE, 443–450. <https://doi.org/10.1109/ROMAN.2006.314368>
- [80] • Takafumi Matsumaru. 2007. Mobile Robot with Preliminary-announcement and Indication Function of Forthcoming Operation using Flat-panel Display. In *Proceedings 2007 IEEE International Conference on Robotics and Automation*. IEEE, 1774–1781. <https://doi.org/10.1109/ROBOT.2007.363579>
- [81] • Takafumi Matsumaru, Kazuya Iwase, Kyuhei Akiyama, Takashi Kusada, and Tomotaka Ito. 2005. Mobile Robot with Eyeball Expression as the Preliminary-Announcement and Display of the Robot's Following Motion. *Autonomous Robots* 18, 2 (2005), 231–246. <https://doi.org/10.1007/s10514-005-0728-8>
- [82] • Takafumi Matsumaru, Takashi Kusada, and Kazuya Iwase. 2006. Mobile Robot with Preliminary-Announcement Function of Forthcoming Motion using Light-ray. In *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 1516–1523. <https://doi.org/10.1109/IROS.2006.281981>
- [83] • Masahiko Mikawa, Yuriko Yoshikawa, and Makoto Fujisawa. 2018. Expression of intention by rotational head movements for teleoperated mobile robot. In *2018 IEEE 15th International Workshop on Advanced Motion Control (AMC)*. IEEE, 249–254. <https://doi.org/10.1109/AMC.2019.8371097>
- [84] • Ajung Moon, Daniel M. Troniak, Brian Gleeson, Matthew K.X.J. Pan, Minhua Zheng, Benjamin A. Blumer, Karon MacLean, and Elizabeth A. Croft. 2014. Meet me where i'm gazing. In *Proceedings of the 2014 ACM/IEEE international conference on Human-robot interaction*, Gerhard Sagerer, Michita Imai, Tony Belpaeme, and Andrea Thomaz (Eds.). ACM, New York, NY, USA, 334–341. <https://doi.org/10.1145/2559636.2559656>
- [85] John Edison Muñoz and Kerstin Dautenhahn. 2021. Robo Ludens: A Game Design Taxonomy for Multiplayer Games Using Socially Interactive Robots. *J. Hum.-Robot Interact.* 10, 4, Article 32 (jul 2021), 28 pages. <https://doi.org/10.1145/3451343>
- [86] • James Mullen, Josh Mosier, Sounak Chakrabarti, Anqi Chen, Tyler White, and Dylan Losey. 2021. Communicating Inferred Goals With Passive Augmented Reality and Active Haptic Feedback. *IEEE Robotics and Automation Letters* 6, 4 (2021), 8522–8529. <https://doi.org/10.1109/LRA.2021.3111055>
- [87] Florian Müller, Martin Schmitz, Daniel Schmitt, Sebastian Günther, Markus Funk, and Max Mühlhäuser. 2020. Walk The Line: Leveraging Lateral Shifts of the Walking Path as an Input Modality for Head-Mounted Displays. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems (Honolulu, HI, USA) (CHI '20)*. Association for Computing Machinery, New York, NY, USA, 1–15. <https://doi.org/10.1145/3313831.3376852>
- [88] • Bilge Mutlu, Fumitaka Yamaoka, Takayuki Kanda, Hiroshi Ishiguro, and Norihiro Hagita. 2009. Nonverbal leakage in robots. In *Proceedings of the 4th ACM/IEEE international conference on Human robot interaction - HRI '09*, Matthias Scheutz, François Michaud, Pamela Hinds, and Brian Scassellati (Eds.). ACM Press, New York, New York, USA, 69. <https://doi.org/10.1145/1514095.1514110>
- [89] • Rhys Newbury, Akansel Cosgun, Tysha Crowley-Davis, Wesley P. Chan, Tom Drummond, and Elizabeth Croft. [n.d.]. Visualizing Robot Intent for Object Handovers with Augmented Reality. <https://doi.org/10.48550/arXiv.2103.04055>
- [90] Yohei Noguchi and Fumihide Tanaka. 2020. OMOY: A Handheld Robotic Gadget that Shifts its Weight to Express Emotions and Intentions. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. ACM. <https://doi.org/10.1145/3313831.3376775>
- [91] • Michael Novitzky, Charles Pippin, Thomas R. Collins, Tucker R. Balch, and Michael E. West. 2012. Bio-inspired multi-robot communication through behavior recognition. In *2012 IEEE International Conference on Robotics and Biomimetics (ROBIO)*. IEEE, 771–776. <https://doi.org/10.1109/ROBIO.2012.6491061>
- [92] Alison O'Mara-Eves, James Thomas, John McNaught, Makoto Miwa, and Sophia Ananiadou. 2015. Using text mining for study identification in systematic reviews: a systematic review of current approaches. *Systematic Reviews* 4, 1 (Jan. 2015). <https://doi.org/10.1186/2046-4053-4-5>

- [93] Linda Onnasch and Eileen Roesler. 2020. A Taxonomy to Structure and Analyze Human–Robot Interaction. *International Journal of Social Robotics* 13, 4 (June 2020), 833–849. <https://doi.org/10.1007/s12369-020-00666-5>
- [94] Matthew J. Page, Joanne E. McKenzie, Patrick M. Bossuyt, Isabelle Boutron, Tammy C. Hoffmann, Cynthia D. Mulrow, Larissa Shamseer, Jennifer M. Tetzlaff, Elie A. Akl, Sue E. Brennan, Roger Chou, Julie Glanville, Jeremy M. Grimshaw, Asbjørn Hróbjartsson, Manoj M. Lalu, Tianjing Li, Elizabeth W. Loder, Evan Mayo-Wilson, Steve McDonald, Luke A. McGuinness, Lesley A. Stewart, James Thomas, Andrea C. Tricco, Vivian A. Welch, Penny Whiting, and David Moher. 2021. The PRISMA 2020 statement: an updated guideline for reporting systematic reviews. *Systematic Reviews* 10, 1 (March 2021). <https://doi.org/10.1186/s13643-021-01626-4>
- [95] • Oskar Palinko, Kerstin Fischer, Eduardo Ruiz Ramirez, Lotte Damsgaard Nissen, and Rosalyn M. Langedijk. 2020. A Drink-Serving Mobile Social Robot Selects who to Interact with Using Gaze. In *Companion of the 2020 ACM/IEEE International Conference on Human-Robot Interaction*, Tony Belpaeme, James Young, Hatice Gunes, and Laurel Riek (Eds.). ACM, New York, NY, USA, 384–385. <https://doi.org/10.1145/3371382.3378339>
- [96] Max Pascher, Annalies Baumeister, Stefan Schneegass, Barbara Klein, and Jens Gerken. 2021. Recommendations for the Development of a Robotic Drinking and Eating Aid - An Ethnographic Study. In *Human-Computer Interaction – INTERACT 2021*, Carmelo Ardito, Rosa Lanzilotti, Alessio Malizia, Helen Petrie, Antonio Piccinno, Giuseppe Desolda, and Kori Inkpen (Eds.). Springer, Cham, Switzerland, 331–351. https://doi.org/10.1007/978-3-030-85623-6_21
- [97] Max Pascher, Stefan Schneegass, and Jens Gerken. 2019. SwipeBuddy: A Tele-operated Tablet and Ebook-Reader Holder for a Hands-Free Interaction. In *Human-Computer Interaction – INTERACT 2019*, David Lamas, Fernando Loizides, Lennart Nacke, Helen Petrie, Marco Winckler, and Panayiotis Zaphiris (Eds.), Vol. 11749. Springer, Cham, Switzerland, 568–571. https://doi.org/10.1007/978-3-030-29390-1_39
- [98] • Loizos Psarakis, Dimitris Nathanael, and Nicolas Marmaras. 2022. Fostering short-term human anticipatory behavior in human-robot collaboration. *International Journal of Industrial Ergonomics* 87 (2022), 103241. <https://doi.org/10.1016/j.ergon.2021.103241>
- [99] • Eric Rosen, David Whitney, Elizabeth Phillips, Gary Chien, James Tompkin, George Konidaris, and Stefanie Tellex. 2019. Communicating and controlling robot arm motion intent through mixed-reality head-mounted displays. *The International Journal of Robotics Research* 38, 12-13 (2019), 1513–1526. <https://doi.org/10.1177/0278364919842925>
- [100] Alexandros Rouchitsas and Håkan Alm. 2019. External Human–Machine Interfaces for Autonomous Vehicle-to-Pedestrian Communication: A Review of Empirical Work. *Frontiers in Psychology* 10 (Dec. 2019). <https://doi.org/10.3389/fpsyg.2019.02757>
- [101] • Emanuele Ruffaldi, Filippo Brizzi, Franco Tecchia, and Sandro Bacinelli. 2016. Third Point of View Augmented Reality for Robot Intentions Visualization. In *Augmented Reality, Virtual Reality, and Computer Graphics*, Lucio Tommaso de Paolis and Antonio Mongelli (Eds.). Lecture Notes in Computer Science, Vol. 9768. Springer International Publishing, Cham, 471–478. https://doi.org/10.1007/978-3-319-40621-3_135
- [102] Gerard Salton and Christopher Buckley. 1988. Term-weighting approaches in automatic text retrieval. *Information Processing & Management* 24, 5 (Jan. 1988), 513–523. [https://doi.org/10.1016/0306-4573\(88\)90021-0](https://doi.org/10.1016/0306-4573(88)90021-0)
- [103] Albrecht Schmidt, Michael Beigl, and Hans-W Gellersen. 1999. There is more to context than location. *Computers & Graphics* 23, 6 (1999), 893–901. [https://doi.org/10.1016/S0097-8493\(99\)00120-X](https://doi.org/10.1016/S0097-8493(99)00120-X)
- [104] Lambert Schomaker. 1995. A taxonomy of multimodal interaction in the human information processing system. (1995).
- [105] • Megha Sharma, Dale Hildebrandt, Gem Newman, James E. Young, and Rasit Eskicioglu. 2013. Communicating affect via flight path Exploring use of the Laban Effort System for designing affective locomotion paths. In *2013 8th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 293–300. <https://doi.org/10.1109/HRI.2013.6483602>
- [106] Ben Shneiderman. 2022. *Human-Centered AI*. Oxford University Press.
- [107] Rajinder Sodhi, Hrvoje Benko, and Andrew Wilson. 2012. LightGuide: Projected Visualizations for Hand Movement Guidance. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems* (Austin, Texas, USA) (CHI '12). Association for Computing Machinery, New York, NY, USA, 179–188. <https://doi.org/10.1145/2207676.2207702>
- [108] • Sichao Song and Seiji Yamada. 2018. Bioluminescence-Inspired Human-Robot Interaction. In *Proceedings of the 2018 ACM/IEEE International Conference on Human-Robot Interaction*, Takayuki Kanda, Selma Šabanović, Guy Hoffman, and Adriana Tapus (Eds.). ACM, New York, NY, USA, 224–232. <https://doi.org/10.1145/3171221.3171249>
- [109] • Sichao Song and Seiji Yamada. 2018. Designing LED Lights for Communicating Gaze with Appearance-Constrained Robots. In *2018 27th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 94–97. <https://doi.org/10.1109/ROMAN.2018.8525661>
- [110] • Sichao Song and Seiji Yamada. 2018. Effect of Expressive Lights on Human Perception and Interpretation of Functional Robot. In *Extended Abstracts of the 2018 CHI Conference on Human Factors in Computing Systems*, Regan Mandryk, Mark Hancock, Mark Perry, and Anna Cox (Eds.). ACM, New York, NY, USA, 1–6. <https://doi.org/10.1145/3170427.3188547>
- [111] • Maria Staudte and Matthew W. Crocker. 2009. Visual attention in spoken human-robot interaction. In *Proceedings of the 4th ACM/IEEE international conference on Human robot interaction - HRI '09*, Matthias Scheutz, François Michaud, Pamela Hinds, and Brian Scassellati (Eds.). ACM Press, New York, New York, USA, 77. <https://doi.org/10.1145/1514095.1514111>
- [112] Didi Surian, Florence T. Bourgeois, and Adam G. Dunn. 2021. The automation of relevant trial registration screening for systematic review updates: an evaluation study on a large dataset of ClinicalTrials.gov registrations. *BMC Medical Research Methodology* 21, 1 (Dec. 2021). <https://doi.org/10.1186/s12874-021-01485-6>
- [113] Ryo Suzuki, Adnan Karim, Tian Xia, Hooman Hedayati, and Nicolai Marquardt. 2022. Augmented Reality and Robotics: A Survey and Taxonomy for AR-Enhanced Human-Robot Interaction and Robotic Interfaces. In *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems* (New Orleans, LA, USA) (CHI '22). Association for Computing Machinery, New York, NY, USA, Article 553, 33 pages. <https://doi.org/10.1145/3491102.3517719>
- [114] • Daniel Szafir, Bilge Mutlu, and Terrence Fong. 2014. Communication of intent in assistive free flyers. In *Proceedings of the 2014 ACM/IEEE international conference on Human-robot interaction*, Gerhard Sagerer, Michita Imai, Tony Belpaeme, and Andrea Thomaz (Eds.). ACM, New York, NY, USA, 358–365. <https://doi.org/10.1145/2559636.2559672>
- [115] • Daniel Szafir, Bilge Mutlu, and Terry Fong. 2015. Communicating Directionality in Flying Robots. In *Proceedings of the Tenth ACM/IEEE International Conference on Human-Robot Interaction*, Julie A. Adams, William Smart, Bilge Mutlu, and Leila Takayama (Eds.). ACM, New York, NY, USA, 19–26. <https://doi.org/10.1145/2696454.2696475>
- [116] • Leila Takayama, Doug Dooley, and Wendy Ju. 2011. Expressing thought. In *Proceedings of the 6th international conference on Human-robot interaction - HRI '11*, Aude Billard, Peter Kahn, Julie A. Adams, and Greg Trafton (Eds.). ACM Press, New York, New York, USA, 69. <https://doi.org/10.1145/1957656.1957674>
- [117] • Gilbert Tang, Phil Webb, and John Thrower. 2019. The development and evaluation of Robot Light Skin: A novel robot signalling system to improve communication in industrial human–robot collaboration. *Robotics and Computer-Integrated Manufacturing* 56 (2019), 85–94. <https://doi.org/10.1016/j.rcim.2018.08.005>
- [118] Sam Thellman and Tom Ziemke. 2021. The Perceptual Belief Problem. *ACM Transactions on Human-Robot Interaction* 10, 3 (2021), 1–15. <https://doi.org/10.1145/3461781>
- [119] Andrea C. Tricco, Erin Lillie, Wasifa Zarin, Kelly K. O'Brien, Heather Colquhoun, Danielle Levac, David Moher, Micah D.J. Peters, Tanya Horsley, Laura Weeks, Susanne Hempel, Elie A. Akl, Christine Chang, Jessie McGowan, Lesley Stewart, Lisa Hartling, Adrian Aldcroft, Michael G. Wilson, Chantelle Garritty, Simon Lewin, Christina M. Godfrey, Marilyn T. Macdonald, Etienne V. Langlois, Karla Soares-Weiser, Jo Moriarty, Tammy Clifford, Özge Tunçalp, and Sharon E. Straus. 2018. PRISMA Extension for Scoping Reviews (PRISMA-ScR): Checklist and Explanation. *Annals of Internal Medicine* 169, 7 (Oct. 2018), 467–473. <https://doi.org/10.7326/m18-0850>
- [120] • Georgios Tsamis, Georgios Chantziaras, Dimitrios Giakoumis, Ioannis Kostavelis, Andreas Kargakos, Athanasios Tsakiris, and Dimitrios Tzovaras. 2021. Intuitive and Safe Interaction in Multi-User Human Robot Collaboration Environments through Augmented Reality Displays. In *2021 30th IEEE International Conference on Robot & Human Interactive Communication (RO-MAN)*. IEEE, 520–526. <https://doi.org/10.1109/RO-MAN50785.2021.9515474>
- [121] Sanne van Waveren, Linnéa Björklund, Elizabeth J. Carter, and Iolanda Leite. 2019. Knock on Wood: The Effects of Material Choice on the Perception of Social Robots. In *Social Robotics*, Miguel A. Salichs, Shuzhi Sam Ge, Emilia Ivanova Barakova, John-John Cabibihan, Alan R. Wagner, Álvaro Castro-González, and Hongsheng He (Eds.). Springer International Publishing, Cham, 211–221.
- [122] Ana M Villanueva, Ziyi Liu, Zhengzhe Zhu, Xin Du, Joey Huang, Kylie A Peeper, and Karthik Ramani. 2021. RobotAR: An Augmented Reality Compatible Teleconsulting Robotics Toolkit for Augmented Makerspace Experiences. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems* (Yokohama, Japan) (CHI '21). Association for Computing Machinery, New York, NY, USA, Article 477, 13 pages. <https://doi.org/10.1145/3411764.3445726>
- [123] Erik von Elm, Gerhard Schreiber, and Claudia Cornelia Haupt. 2019. Methodische Anleitung für Scoping Reviews (JBI-Methodologie). *Zeitschrift für Evidenz, Fortbildung und Qualität im Gesundheitswesen* 143 (June 2019), 1–7. <https://doi.org/10.1016/j.zefq.2019.05.004>
- [124] • Michael Walker, Hooman Hedayati, Jennifer Lee, and Daniel Szafir. 2018. Communicating Robot Motion Intent with Augmented Reality. In *Proceedings of the 2018 ACM/IEEE International Conference on Human-Robot Interaction*, Takayuki Kanda, Selma Šabanović, Guy Hoffman, and Adriana Tapus (Eds.). ACM, New York, NY, USA, 316–324. <https://doi.org/10.1145/3171221.3171253>

- [125] Sebastian Walkötter, Silvia Tulli, Ginevra Castellano, Ana Paiva, and Mohamed Chetouani. 2021. Explainable Embodied Agents Through Social Cues: A Review. *J. Hum.-Robot Interact.* 10, 3, Article 27 (jul 2021), 24 pages. <https://doi.org/10.1145/3457188>
- [126] Lihui Wang, Robert Gao, Jozsef Vánca, Jörg Krüger, Xi Vincent Wang, Sotiris Makris, and George Chryssolouris. 2019. Symbiotic human-robot collaborative assembly. *CIRP Annals* 68, 2 (2019), 701–726. <https://doi.org/10.1016/j.cirp.2019.05.002>
- [127] • Atsushi Watanabe, Tetsushi Ikeda, Yoichi Morales, Kazuhiko Shinozawa, Takahiro Miyashita, and Norihiro Hagita. 2015. Communicating robotic navigational intentions. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 5763–5769. <https://doi.org/10.1109/IROS.2015.7354195>
- [128] • Tim Wengefeld, Dominik Hochemer, Benjamin Lewandowski, Mona Kohler, Manuel Beer, and Horst-Michael Gross. 2020. A Laser Projection System for Robot Intention Communication and Human Robot Interaction. In *2020 29th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 259–265. <https://doi.org/10.1109/RO-MAN47096.2020.9223517>
- [129] Jacob O. Wobbrock and Julie A. Kientz. 2016. Research Contributions in Human-Computer Interaction. *Interactions* 23, 3 (apr 2016), 38–44. <https://doi.org/10.1145/2907069>
- [130] • Lisa Zahray, Richard Savery, Liana Syrkett, and Gil Weinberg. 2020. Robot Gesture Sonification to Enhance Awareness of Robot Status and Enjoyment of Interaction. In *2020 29th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 978–985. <https://doi.org/10.1109/RO-MAN47096.2020.9223452>
- [131] • Allan Zhou, Dylan Hadfield-Menell, Anusha Nagabandi, and Anca D. Dragan. 2017. Expressive Robot Motion Timing. In *Proceedings of the 2017 ACM/IEEE International Conference on Human-Robot Interaction*, Bilge Mutlu, Manfred Tscheligi, Astrid Weiss, and James E. Young (Eds.). ACM, New York, NY, USA, 22–31. <https://doi.org/10.1145/2909824.3020221>
- [132] • Mark Zolotas and Yiannis Demiris. 2019. Towards Explainable Shared Control using Augmented Reality. In *2019 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 3020–3026. <https://doi.org/10.1109/IROS40897.2019.8968117>